Gateway Apartments Issaquah, WA

Transportation Impact Study

June 2016

Prepared for:

The Wolff Company 6710 E Camelback Road Suite 100 Scottsdale, AZ 85251

Prepared by:

%TENW

Transportation Engineering NorthWest

11400 SE 8th Street, Suite 200

Bellevue, WA 98004

Office: (425) 889-6747

Fax: (425) 889-8369

Table of Contents

FINDINGS/CONCLUSIONS	1
INTRODUCTION	2
Project Description	2
Project Approach	2
Primary Data and Information Sources	2
EXISTING CONDITIONS	5
Roadway Network	5
Existing Traffic Volumes	5
Pedestrian & Bicycle Facilities	5
FUTURE CONDITIONS AND TRAFFIC IMPACT ANALYSIS	7
Project Trip Generation	7
Future Traffic Volumes	7
Intersection Level of Service	8
Future Site Access Traffic Control Evaluation	0
Channelization & Frontage1	1
Turn Lane Evaluation	2
Safety1	2
Neighborhood Impacts	2
Pedestrian & Bicycle Impacts	3
MITIGATION	4
Off-Site Improvements	4
Transportation Impact Fees	4
Appendices	
Appendix A – Existing Traffic Counts	
Appendix B – Trip Generation Calculations	
Appendix C – Level of Service Calculations (Stop Controlled)	
Appendix D – Level of Service Calculations (Signalized and Roundabout Alternatives)	
Appendix E – Signal Warrant Analysis	



List of Figures and Tables

Figure 1	Project Site Vicinity	. 3
Figure 2	Preliminary Site Plan	. 4
Figure 3	Traffic Volumes	. 6
Table 1	Gateway Apartments Trip Generation Summary	. 7
Table 2	LOS Criteria for Signalized and Unsignalized Intersections ¹	. 8
Table 3	Site Access Peak Hour LOS Summary – Stop Controlled.	. 9
Table 4	Site Access Peak Hour LOS Summary – Access Alternatives	11



FINDINGS/CONCLUSIONS

This traffic impact analysis was prepared for the Gateway Apartments development located on Newport Way NW across from NW Pacific Elm Drive in the City of Issaquah.

Project Proposal. The project proposal includes 400 residential apartment units. The existing site contains one single-family home to be removed. Vehicular access to the site is proposed via a single access intersecting with Newport Way NW across from the NW Pacific Elm Drive access. Full project buildout is expected by 2018.

Trip Generation. The Gateway Apartments development is estimated to generate a total of 2,650 net new weekday daily trips with 203 net new trips during the AM peak hour (41 entering, 162 exiting) and 247 net new trips during the PM peak hour (160 entering, 87 exiting).

Future Year LOS. Weekday AM and PM peak hour LOS analyses were conducted at the proposed site access intersection with Newport Way NW at NW Pacific Elm Drive. The results of the LOS analyses showed that the movements at the stop controlled intersections are anticipated to operate at LOS D or better in 2018 during the AM peak hour and LOS F during the PM peak hour with the proposed project.

Mitigation:

Off-Site Improvements. Based on the results of the LOS analysis, the project will construct a roundabout at the Newport Way NW / NW Pacific Elm Drive intersection.

<u>Transportation Impact Fees.</u> To mitigate long-term traffic impacts, the City of Issaquah requires payment of a traffic impact fee. The City's currently adopted impact fee rates are \$4,977.20 per apartment unit and \$8,031.39 per single-family dwelling unit. Based on 400 apartment units and credit for 1 existing single-family home, the resulting impact fee would be <u>\$1,982,848.61</u> (400 X \$4,977.20/apartment unit – \$8,031.39/single-family home).



INTRODUCTION

This traffic impact analysis was prepared for the Gateway Apartments development located on the north side of Newport Way NW directly across from the NW Pacific Elm Drive serving the Spyglass Hill residents in the City of Issaquah as shown in the **Figure 1** vicinity map.

Project Description

The project includes 400 residential apartment units on a site that was previously occupied by 1 single-family home which was removed. Vehicular access to the site is proposed via a single access intersecting with Newport Way NW across from the existing Spyglass Hill residences and access at NW Pacific Elm Drive. Full project buildout is expected by 2018. A site plan is provided in **Figure 2**.

Project Approach

The specific scope items included in the evaluation of traffic impacts and recommended mitigation measures were discussed and confirmed by City staff. To analyze the traffic impacts from the Gateway Apartments project, the following tasks were undertaken:

- Assessed existing conditions through field reconnaissance and reviewed existing planning documents;
- Estimated trip generation and documented trip distribution and assignment of project traffic:
- Documented traffic forecasts and assumptions for year 2018 conditions without and with the proposed development;
- Conducted weekday AM and PM peak hour level of service analyses at the Newport Way NW & NW Pacific Elm Drive intersection (location of the proposed site access);
- Conducted level of service analyses for the following future site access scenarios:
 - 1. Signalized
 - 2. Roundabout
- Identified transportation mitigation fees to the City of Issaquah.

Primary Data and Information Sources


- Institute of Transportation Engineers (ITE), *Trip Generation Manual*, 9th Edition, 2012.
- 2015 daily and peak hour traffic counts, All Traffic Data.
- Highway Capacity Manual (HCM), TRB, 2010.





Figure 1: Site Vicinity



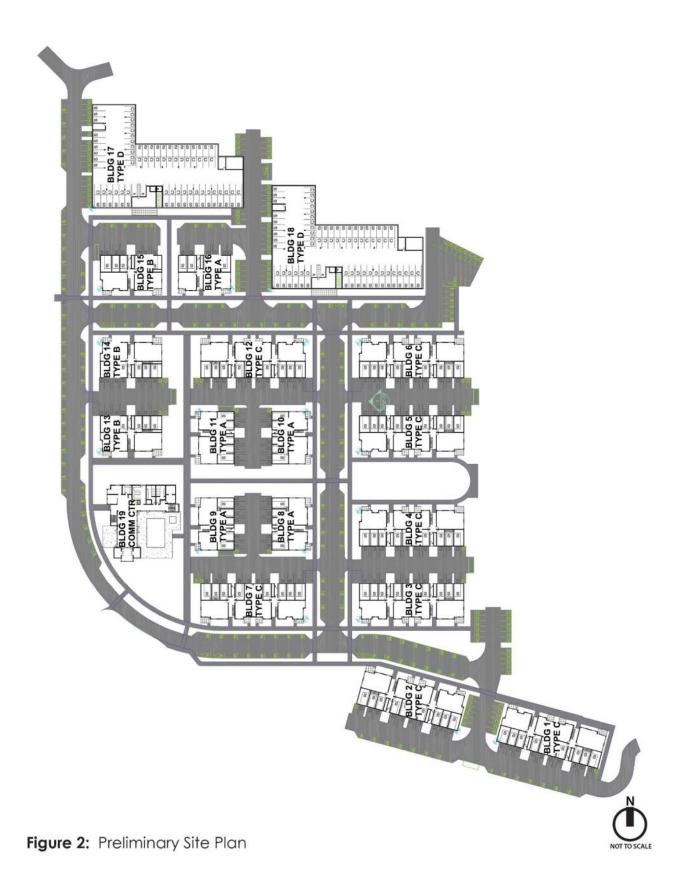

% TENW

EXISTING CONDITIONS

Roadway Network

The primary travel route to and from the site is Newport Way NW. The relationship of this roadway to the project site is shown in Figure 1.

Newport Way NW is a 2-lane minor arterial road that carries traffic between Lakemont Boulevard (in Bellevue to the west) and SR-900 to the east. There are turn-lanes provided at a few City road and access locations with intersections serving residential developments.

The posted speed is 30 mph, which was reduced from 40 mph by the City in September 2015.

Existing Traffic Volumes

Existing weekday AM and PM peak hour traffic volumes at the proposed site access location were based on counts conducted by All Traffic Data on Wednesday, July 29, 2015 at the Newport Way NW intersection with NW Pacific Elm Drive. Because the counts were conducted outside of the school year, a seasonality adjustment was made to the counts. This adjustment was based on the comparison of AM and PM peak hour counts conducted in November 2014 at the same intersection, to the recent peak hour counts conducted for this analysis. Based on this comparison, a 10 percent seasonality factor (increase) was used to estimate existing traffic volumes during the school year.

Figure 3 illustrates the 2015 existing weekday daily, AM, and PM peak hour traffic volumes at the Newport Way NW & NW Pacific Elm Drive intersection. **Appendix A** includes the existing peak hour turning movement data at the study intersections.

Pedestrian & Bicycle Facilities

Bicycle lanes currently exist along both sides of Newport Way and would be maintained with future development and widening at the site access intersection with NW Pacific Elm Drive. The *Central Issaquah Plan* identifies this section of Newport Way as a "Parkway" that will include a center turn lane and maintain bicycle lanes on both sides.

The City completed a City-wide Pedestrian Crossing Study (dated October 2015) that evaluated priority public pedestrian crossings. One of the locations included in that study is Newport Way between 54th Street and SR-900.



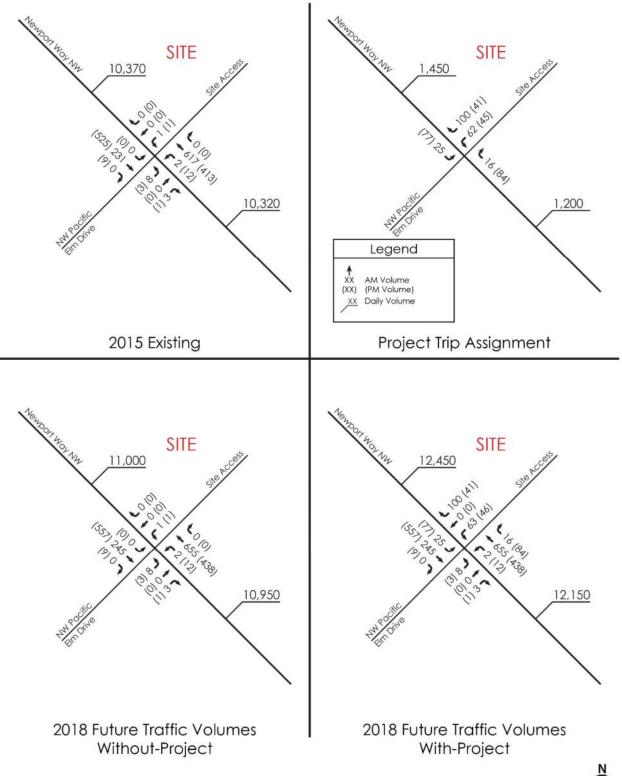


Figure 3: Daily, AM, and PM Peak Hour Traffic Volumes



FUTURE CONDITIONS and TRAFFIC IMPACT ANALYSIS

Project Trip Generation

The trip generation estimate for the Gateway Apartments development was based on the methodology included in the Institute of Transportation Engineers (ITE) *Trip Generation Manual*, 9th edition for Land Use Code (LUC) 220 (Apartments). The resulting weekday daily, AM, and PM peak hour trip generation associated with the proposed project is summarized in **Table 1**.

Table 1
Gateway Apartments Trip Generation Summary

	Net Nev	w Trips Ger	nerated
Time Period	ln	Out	Total
Weekday Daily	1,325	1,325	2,650
Weekday AM Peak Hour	41	162	203
Weekday PM Peak Hour	160	87	247

Note: based on ITE Trip Generation Manual, 9th Edition, 2012.

As shown in **Table 1**, the Gateway Apartments project is estimated to generate 2,650 net new weekday daily trips, with 203 net new trips occurring during the weekday AM peak hour (41 entering, 162 exiting) and 247 net new trips occurring during the weekday PM peak hour (160 entering, 87 exiting). Detailed trip generation calculations are included in **Appendix B**.

Future Traffic Volumes

To estimate future traffic volumes on Newport Way that include known and anticipated growth from pipeline development in the area, a 2 percent annual growth rate was applied to the existing volumes along with the seasonality adjustment. Weekday AM and PM peak hour Gateway Apartments project trips were added to the 2018 baseline volumes, resulting in an estimated year 2018 daily and peak hour traffic volumes when the Gateway Apartments project is expected to be open. A summary of the daily and peak hour traffic volumes used in the intersection LOS analyses were shown previously in Figure 3.



Intersection Level of Service

LOS generally refers to the degree of congestion on a roadway or intersection. It is a measure of vehicle operating speed, travel time, travel delays, and driving comfort. A letter scale from A to F generally describes intersection LOS. At signalized intersections, LOS A represents free-flow conditions (motorists experience little or no delays), and LOS F represents forced-flow conditions where motorists experience an average delay in excess of 80 seconds per vehicle.

The LOS reported at stop-controlled intersections is based on the average control delay and can be reported for each controlled minor approach, controlled minor lane group, and controlled major-street movement (additional v/c ratio criteria apply to lane group or movement LOS only).

Table 2 outlines the current HCM 2010 LOS criteria for signalized and unsignalized intersections based on these methodologies.

Table 2
LOS Criteria for Signalized and Unsignalized Intersections¹

SIGNALIZ	ZED INTERSECTION	<u>SNC</u>	<u>UNSIGNALIZ</u>	<u>UNSIGNALIZED INTERSECTIONS</u>						
	LOS by Vo				<u>olume-to</u> V/C) Ratio³					
Control Delay (sec/veh)	≤ 1.0	> 1.0	Control Delay (sec/veh)	≤ 1.0	> 1.0					
≤ 10	Α	F	≤ 10	А	F					
$> 10 \text{ to} \le 20$	В	F	$> 10 \text{ to} \le 15$	В	F					
$> 20 \text{ to} \le 35$	С	F	$> 15 \text{ to } \le 25$	С	F					
$> 35 \text{ to} \le 55$	D	F	> 25 to ≤ 35	D	F					
> 55 to ≤ 80	E	F	$> 35 \text{ to} \le 50$	E	F					
> 80	F	F	> 50	F	F					

¹ Source: HCM2010 Highway Capacity Manual, Transportation Research Board, 2010.

LOS calculations for the unsignalized intersections were calculated using the methodology and procedures outlined in the 2010 *Highway Capacity Manual* (HCM), Special Report 209, and Transportation Research Board (TRB). Intersection LOS were determined using the <u>Synchro 8</u> software program.

² For approach-based and intersection-wide assessments at signals, LOS is defined solely by control delay.

³ For two-way stop controlled intersections, the LOS criteria apply to each lane on a given approach and to each approach on the minor street. LOS is not calculated for major-street approaches or for the intersection as a whole at two-way stop controlled intersections. For approach-based and intersection-wide assessments at all-way stop controlled intersections and roundabouts, LOS is solely defined by control delay.

The City's adopted level of service standard is LOS D consistent with the latest edition of the *Highway Capacity Manual*. According to the City's TIA Guidelines, a development that exceeds the maximum allowable delay at a driveway or local roadway not included in the City's transportation concurrency analysis is considered as having a probably significant adverse impact and will be required to mitigate that impact.

Weekday AM and PM peak hour LOS, delays, and queues were evaluated at the intersection of the proposed access onto Newport Way NW at NW Pacific Elm Drive. LOS and queues were evaluated for future with-project conditions in 2018 assuming stop signs controlling the side-street turns. The results of the analysis are summarized in the **Table 3** below. Detailed LOS results are provided in **Appendix C**.

Table 3
Site Access Peak Hour LOS Summary – Stop Controlled

	Weeko	day AM Pea	k Hour	Week	day PM Pea	k Hour
Location / Approach	LOS ¹	Delay ² (sec/veh)	95 th % Queue ³	LOS1	Delay ² (sec/veh)	95 th % Queue ³
From Gateway Apartments:						
SB Left-Turn	D	31.4	1 veh.	F	60.2	2 veh.
SB Shared Thru-Right	С	16.2	2 veh.	В	11.9	1 veh.
From Spyglass Residences:						
NB Approach	D	26.0	1 veh.	D	34.4	1 veh.
On Mainline Newport Way:						
EB Left-Turn	Α	9.2	1 veh.	Α	8.7	1 veh.
WB Left-Turn	Α	7.8	<1 veh.	Α	8.9	<1 veh.

^{1.} LOS = Level of Service.

As shown in **Table 3**, side-street turns from the proposed site access (Gateway Apartments) onto Newport Way are anticipated to operate at LOS D in the AM peak hour and LOS F in the PM peak hour. As a result, and consistent with City TIA Guidelines, the proposed project would have a probably significant adverse impact and will be required to mitigate the impact. Both signalization and roundabout control were considered, which are described in next section.

^{2.} Delay refers to average control delay in seconds per vehicle

^{3. 95}th percentile queues represent maximum queues that occur during the peak hours.

Future Site Access Traffic Control Evaluation

As a result of the LOS F operation anticipated during the weekday PM peak hour at the site access location on Newport Way, both signalized and roundabout control were considered as mitigation for traffic impacts of the Gateway Apartments project at this location.

Signal Warrant Evaluation

A comprehensive traffic signal warrant analysis was conducted based on year 2018 buildout conditions with the Gateway Apartments project using a 2 percent annual growth factor from counts conducted in 2015 counts. The speed study results, which were based on 40 mph posted speed, showed that the existing 85th-percentile speeds on Newport Way are currently greater than 40 mph (measured 45 mph). As a result, multiple MUTCD signal warrants would be met based on the 85th-percentile speeds on Newport Way at the Gateway Apartments site access intersection. The signal warrant analysis utilized MUTCD criteria allowing 70 percent of the threshold traffic volumes with 85th-percentile travel speeds exceeding 40 mph.

After the City expects to lowered the posted speed on this section of Newport Way to 30 mph, vehicle travel speeds along this corridor were observed to be reduced to less than 40 mph. If travel speeds along Newport Way at the location of the access were less than 40 mph, then it is likely that the side-street volumes would not be high enough to meet MUTCD signal warrants for existing conditions. However, as traffic volumes increase along this corridor, signal warrants are expected to be met in the future. With a signal, the AM and PM peak hour LOS is expected to be LOS B as shown in Table 4 on the next page. The detailed signal warrant analysis results are provided in Appendix E.

Roundabout Evaluation

Evaluation of the site access intersection on Newport Way at Pacific Elm Drive also considered control with a single-lane roundabout (RAB). A single-lane RAB would reduce speeds for travel along Newport Way and provide for improved peak hour LOS and reduced delays for traffic from the side-streets to Newport Way. The RAB would provide marked pedestrian crossings on all 4 legs of the intersection.

With a RAB, the intersection is anticipated to operate at LOS B during the AM and PM peak hours based on use of Sidra 6.1 software. The RAB LOS analysis results are summarized in **Table 4** on the next page and detailed calculations are included in **Appendix D**.

LOS Summary

Table 4 on the next page summarizes the LOS at the Gateway Apartments site access intersection with Pacific Elm Drive for the 3 different intersection control options (stop signs, signalization, RAB). Overall intersection LOS and delays are provided in Table 3 along with the side-street LOS and delays for the Gateway Apartments project and from Spyglass residents on Pacific Elm Drive. The LOS analysis were based on future year 2018 (anticipated year of opening for Gateway Apartments project) traffic volume projections, and future channelization and frontage improvements with the Gateway Apartments project.



Table 4
Site Access Peak Hour LOS Summary – Access Alternatives

	<u>Side-Stree</u>	t Stop Signs	Signo	alization	<u>Roun</u>	<u>dabout</u>
Location / Approach	LOS1	Delay ²	LOS	Delay	LOS	Delay
AM Peak Hour:						
Overall Intersection:			Α	6.3	В	11.5
From Gateway:						
SB Left-Turn	D	31.4	В	11.4	В	11.6
SB Thru-Right	С	16.2	В	12.4	5	11.0
From Spyglass:						
NB Approach	D	26.0	В	11.1	Α	4.8
On Newport Way:						
EB Left-Turn	Α	9.2	Α	8.9	В	13.6
WB Left-Turn	Α	7.8	Α	4.5	Α	6.3
PM Peak Hour:						
Overall Intersection:			Α	5.2	В	13.4
From Gateway:						
SB Left-Turn	F	60.2	В	11.2	Α	7.2
SB Thru-Right	В	11.9	В	11.5	, ,	,
From Spyglass:						
NB Approach	D	34.4	В	10.9	Α	7.2
On Newport Way:						
EB Left-Turn	Α	8.7	Α	6.5	В	11.9
WB Left-Turn	Α	8.9	Α	7.3	С	15.4

^{1.} LOS = Level of Service.

Channelization & Frontage

Consistent with City road standards and the *Central Issaquah Plan*, the Gateway Apartments project will widen the north side of Newport Way along its property frontage to provide new half-street improvements. These include road widening to accommodate a new 12-foot-wide center turn lane, 5-foot bicycle lane, 5-foot landscape strip, and 10-foot shared multimodal path.

The need for both left-turn and right-turn lanes were also evaluated at the site access location on Newport Way. With signalization, a new right-turn lane would be provided in the westbound direction with a 100-foot pocket and 44-foot taper (4:1). Widening to include a center turn lane is also planned with the signal to accommodate the additional traffic generated by the Gateway Apartments project, and to improve safety by removing eastbound left-turning traffic from the through travel lane. A complimentary left-turn lane would be provided for the Spyglass Hill at NW Pacific Elm Drive site access as well. The center turn lane along Newport Way is a programmed improvement in the City's six-year Transportation Improvement Plan (TIP).

With a roundabout at the Newport Way NW at NW Pacific Elm Drive intersection, single-lane approaches would be provided while also maintaining the required frontage improvements. No additional widening for left-turn or right-turn lanes would be provided with the single-lane RAB control.

^{2.} Delay refers to average control delay in seconds per vehicle.

Turn Lane Evaluation

Both left-turn and right-turn lanes were evaluated at the site access location on Newport Way. Widening to include a center turn lane and a right-turn pocket were proposed to accommodate the additional traffic generated by the Gateway Apartments project. This design was reflected in the channelization plan previously submitted to the City. The right-turn pocket is designed to begin after the existing driveway to the east.

Safety

According to the City's TIA Guidelines, the addition of 10 or more peak hour trips to a High Accident Location (HAL) is considered a probably significant adverse impact. When a development proposal impacts a HAL, the City may require reasonable mitigation even if the LOS thresholds are not exceeded. The City may also consider other safety threshold requirements.

At the time of this TIA, it was not known whether the City has designated this section of Newport Way as a HAL. The proposed Gateway Apartments project will add more than 10 peak hour trips to Newport Way.

The City's recent reduction of the posted speed on this section of NW Newport Way to 30 between SR-900 and 54^{th} Street may help to improve safety along the Newport Way NW corridor.

Neighborhood Impacts

In the project vicinity, Newport Way is currently 2-lane minor arterial road located on the south side of I-90 that carries traffic between Lakemont Boulevard (in Bellevue to the west) and SR-900 to the east. There are turn lanes provided at a few locations with intersections serving residential developments. The posted speed was recently reduced to 30 mph.

The *Central Issaquah Plan* identifies this section of Newport Way as a "Parkway" that will include a center turn lane with bicycle lanes maintained on both sides. The addition of a center turn lane on Newport Way will provide about 40 percent additional capacity¹ compared to a 2-lane road, as well as safer travel allowing turning vehicles a separate turn lane from through traffic.

The location of the access for Gateway Apartments occurs on the north side of Newport Way NW directly across from an existing residential access for Spyglass Hill at NW Pacific Elm Drive. There currently is a short eastbound right-turn lane on Newport Way at this access location for traffic into Pacific Elm Drive. With signalization at this intersection, the eastbound right-turn lane would be maintained, along with the addition of a center turn lane and westbound right-turn lane into the Gateway Apartments project site. With a RAB, the right-turn and left-turn lanes would be eliminated at this intersection and all legs would have single-lane approaches.

¹ Source: King County Roadway Link Capacity Values. 2-lane urban road has 13,200 ADT two-way capacity and 760 peak hour one-way capacity. 3-lane urban road has 19,220 ADT two-way capacity and 1,030 peak hour one-way capacity.



The future frontage and road section required for the Gateway Apartments project includes a 10-foot wide multimodal path along the northerly property, together with a landscape stripe separating the trail from the on-street bicycle land and west-bound travel lanes. Where a center turn lane is not required, a landscape median would separate the east-bound travel and bike lanes. A 10-foot travel lane is proposed to promote slower speeds along the corridor, together with 5-foot bike lanes.

The driveway serving the adjacent Sammamish Point Condos is located approximately 230 feet to the east. Future access control, whether it be signalization or a roundabout, will consider the location of this driveway to ensure that adequate provisions are made for inbound and outbound turning traffic to/from Newport Way. With signalization of the Gateway Apartments access at Pacific Elm Drive, full access may be maintained for all turning movements at the western Sammamish Point Condos access. With a roundabout, the Sammamish Point Condos west access may be limited to allow only right-in and right-out turn movements as a result of the roundabout design and required lane transitions. Inbound left-turns would need to re-route to the eastern access driveway, and outbound left-turns (wanted to head east) would be able to turn right and utilize the roundabout to travel east.

Pedestrian & Bicycle Impacts

Currently at the intersection of Pacific Elm Drive there is not a marked crosswalk on Newport Way. Whether signalization or a roundabout is constructed at the location of the proposed access for the Gateway Apartments project, adequate facilities meeting City road standards and design requirements will be included that comprise of marked crosswalks on all 4 legs of the intersection. Bicycle lanes will continue to be provided along both sides of Newport Way NW with the Gateway Apartments development.



MITIGATION

The following measures are proposed to mitigate transportation impacts of the proposed Gateway Apartments development.

Off-Site Improvements

Based on the results of the LOS analysis shown in this report, the project will construct a roundabout at the Newport Way NW / NW Pacific Elm Drive intersection.

Transportation Impact Fees

To mitigate long-term traffic impacts, the City of Issaquah requires payment of a traffic impact fee. The City's currently adopted impact fee rates are \$4,977.20 per apartment unit and \$8,031.39 per single-family dwelling unit. Based on 400 apartment units and credit for 1 existing single-family home, the resulting impact fee would be \$1,982,848.61 (400 X \$4,977.20/apartment unit - \$8,031.39/single-family home).



Appendix A

Existing Traffic Volumes

Peak Hour Summary Site ID: 4 All Traffic Data Eric Boivin (303) 668-0220 NW PACIFIC ELM DR & NEWPORT WAY NW 7:45 AM to 8:45 AM Wednesday, July 29, 2015 200TH AVE SE 1 0 0 0 1 0 Û Ľ 4 Peds 7 **NEWPORT WAY NW** ĸ 0 569 **+** 561 563 Ľ 2 4 0 Peds 0 7 0 7 210 210 214 → 0 4 **NEWPORT WAY NW** Peds 0 U 7 ĸ NW PACIFIC ELM DR 8 3 0 0 2 11 Approach PHF HV% Volume ΕB 0.78 2.4% 210 WB 0.90 2.3% 563 NB 0.0% 0.69 11 SB 0.25 100.0% 1 785 0.93 2.4% Intersection Count Period: 7:00 AM to 9:00 AM

Total Vehicle Summary



Eric Boivin

Site ID: 4

NW PACIFIC ELM DR & NEWPORT WAY NW

Wednesday, July 29, 2015 7:00 AM to 9:00 AM

15-Minute Interval Summary 7:00 AM to 9:00 AM

Interval Start	NV	North V PACIF	bound IC ELM	DR	Southbound 200TH AVE SE			NE	Eastbound NEWPORT WAY NW				Westbound NEWPORT WAY NW				
Time	U	L	Т	R	U	L	Т	R	U	L	Т	R	U	L	Т	R	Total
7:00 AM	0	1	0	0	0	0	0	0	0	0	31	0	0	1	82	0	115
7:15 AM	0	4	0	0	0	0	0	0	0	0	32	2	0	0	136	0	174
7:30 AM	0	1	0	0	0	0	0	0	0	0	39	0	0	0	132	0	172
7:45 AM	0	1	0	0	0	0	0	0	0	0	57	0	0	0	139	0	197
8:00 AM	0	3	0	1	0	0	0	0	0	0	37	0	0	0	156	0	197
8:15 AM	0	2	0	1	0	1	0	0	0	0	49	0	0	0	128	0	181
8:30 AM	0	2	0	1	0	0	0	0	0	0	67	0	0	2	138	0	210
8:45 AM	0	3	0	0	0	0	0	0	0	0	80	0	0	0	111	0	194
Total Survey	0	17	0	3	0	1	0	0	0	0	392	2	0	3	1,022	0	1,440

Peak Hour Summary 7:45 AM to 8:45 AM

By Approach	NW		bound IC ELM	DR		Southbound 200TH AVE SE In Out Total HV			NE		ound WAY N	IW	NE		bound T WAY N	IW	Total
Арргоасп	In	Out	Total	HV	In	Out	Total	HV	In	Out	Total	HV	In	Out	Total	HV	
Volume	11	2	13	0	1	0	1	1	210	569	779	5	563	214	777	13	785
%HV		0.	0%			100	.0%			2.4	1%			2.	3%		2.4%
PHF		0.	69			0.	25			0.	78			0.	90		0.93

Ped	estrians	& Bicy	cles									
In Crosswalk (By Location)												
North	South	East	West									
7	0	0	1									

wв 😓

In 563 Out 214

HV 2.3%

PHF 0.90

t₀

← 561

₹2 U0

NB ↔

In 11 Out 2 HV 0.0%

PHF 0.69

0

0

0 0

U 0

0

Peak Hour Summary

7:45 AM to 8:45 AM

12 0 0

U 0

SB

PHF 0.25

210 **→**0 **→**

EB ➡

In 210

Out 569

HV 2.4%

PHF 0.78

In 1 Out 0 HV 100.0%

کده ۱۵

By Movement	NW	North PACIF	bound IC ELM	DR	Southbound 200TH AVE SE			NE		ound WAY N	1W	NE	Total				
Movement	U	L	Т	R	U	L	Т	R	U	L	Т	R	U	L	Т	R	
Volume	0	8	0	3	0	1	0	0	0	0	210	0	0	2	561	0	785
%HV	0.0%	0.0%	0.0%	0.0%	0.0%	#####	0.0%	0.0%	0.0%	0.0%	2.4%	0.0%	0.0%	50.0%	2.1%	0.0%	2.4%
PHF	0.00	0.67	0.00	0.75	0.00	0.25	0.00	0.00	0.00	0.00	0.78	0.00	0.00	0.25	0.90	0.00	0.93

Rolling Hour Summary 7:00 AM to 9:00 AM


Interval Start	NV	North PACIF	bound IC ELM	DR		Southbound 200TH AVE SE					ound ΓWAY N	1W	NE		bound ΓWAY N	IW.	Interval
Time	U	L	Т	R	U	U L T R				L	Т	R	U	L	Т	R	Total
7:00 AM	0	7	0	0	0	0 0 0 0				0	159	2	0	1	489	0	658
7:15 AM	0	9	0	1	0	0 0 0 0				0	165	2	0	0	563	0	740
7:30 AM	0	7	0	2	0	1	0	0	0	0	182	0	0	0	555	0	747
7:45 AM	0	8	0	3	0	0 1 0 0				0	210	0	0	2	561	0	785
8:00 AM	0	10	0	3	0	0 1 0 0				0	233	0	0	2	533	0	782

	Pedestrians & Bicycles In Crosswalk (By Location)												
North South East West													
4	0 0 0												
4	4 0 0 0												
3	0	0	1										
7	0	0	1										
8	0	0	1										

Heavy Vehicle Summary



Eric Boivin (303) 668-0220



7:45 AM to 8:45 AM

NW PACIFIC ELM DR & NEWPORT WAY NW

Wednesday, July 29, 2015 7:00 AM to 9:00 AM

15-Minute Interval Summary 7:00 AM to 9:00 AM

I.UU AIN	ίŪ	3.00 A	171																		
Interval Start			orthbou ACIFIC E					outhbou OTH AVE					astbour ORT W					estbou ORT W			Interval
Time	U	L	T	R	Total	U	L	Т	R	Total	U	L	Т	R	Total	Ü	L	T	R	Total	Total
7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	0	3	0	3	5
7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7	0	7	7
8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	0	1	0	1	3
8:15 AM	0	0	0	0	0	0	1	0	0	1	0	0	1	0	1	0	0	1	0	1	3
8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	1	3	0	4	6
8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	3	0	3	0	0	1	0	1	4
Total	0	0	0	0	0	0	1	0	0	1	0	0	10	0	10	0	1	16	0	17	0


Peak Hour Summary 7:45 AM to 8:45 AM

Bv		No	orthbound		Sc	outhbound		Е	astbound		W	estbound	
Approach		NW PA	CIFIC ELM DR		200	TH AVE SE		NEWP	ORT WAY NW		NEWP	ORT WAY NW	Total
Approach	In	Out	Total	In	Out	Total	In	Out	Total	In	Out	Total	
Volume	0	1	1	1	0	1	5	12	17	13	6	19	19

Ву			orthbou					uthbou					astbour					estbou			Tatal
Movement		NW PA	CIFICE	LIVIDR	T-4-1		200	TH AVE) E	Total		NEWP	ORT W	AY INVV	T-4-1		NEWP	ORT W	AY INVV	T-4-1	Total
	U	L		l K	Total	U	L	- 1	ĸ	Total	U	L		ĸ	Total	U	L		R	Total	
Volume	0	0	0	0	0	0	1	0	0	1	0	0	5	0	5	0	1	12	0	13	19

Rolling Hour Summary 7:00 AM to 9:00 AM

Interval Start		NW PA	orthbou CIFIC E					outhbou OTH AVE					astbour ORT W					ORT W			Interval
Time	Ü	L	Т	R	Total	U	L	Т	R	Total	U	L	Т	R	Total	Ü	L	Т	R	Total	Total
7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	0	10	0	10	12
7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	4	0	4	0	0	11	0	11	15
7:30 AM	0	0	0	0	0	0	1	0	0	1	0	0	3	0	3	0	0	9	0	9	13
7:45 AM	0	0	0	0	0	0	1	0	0	1	0	0	5	0	5	0	1	12	0	13	19
8:00 AM	0	0	0	0	0	0	1	0	0	1	0	0	8	0	8	0	1	6	0	7	16

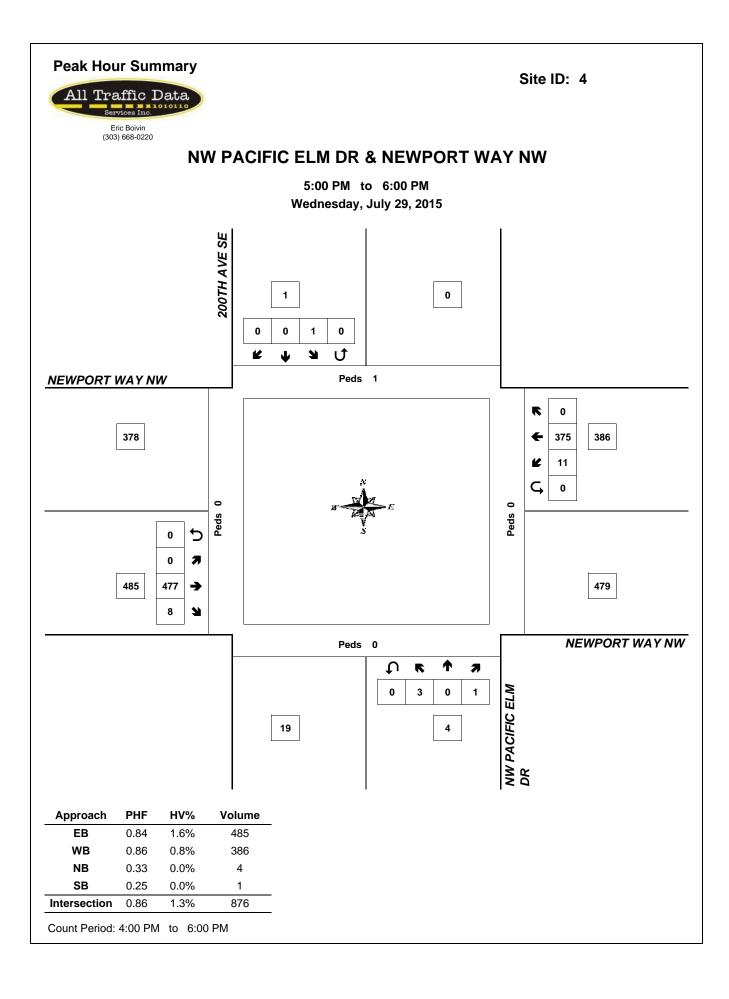

Total Vehicle Summary



Eric Boivin (303) 668-0220

Site ID: 4

NW PACIFIC ELM DR & NEWPORT WAY NW

Wednesday, July 29, 2015 4:00 PM to 6:00 PM

15-Minute Interval Summary 4:00 PM to 6:00 PM

Interval Start	NV	North V PACIF	bound IC ELM	DR		South 200TH	bound AVE SE		NE		oound TWAY N	١W	NE		bound F WAY N	1W	Interval
Time	U	L	T	R	U	L	Т	R	U	L	Т	R	U	L	T	R	Total
4:00 PM	0	2	0	0	0	0	0	0	0	0	107	2	0	1	86	0	198
4:15 PM	0	2	0	0	0	0	0	1	0	0	118	1	0	2	86	0	210
4:30 PM	0	0	0	0	0	0	0	0	0	0	116	2	0	2	90	0	210
4:45 PM	0	0	0	2	0	0	0	0	0	0	126	2	0	2	76	0	208
5:00 PM	0	0	0	1	0	0	0	0	0	0	103	3	0	1	91	0	199
5:15 PM	0	0	0	0	0	0	0	0	0	0	142	2	0	3	109	0	256
5:30 PM	0	0	0	0	0	0	0	0	0	0	125	2	0	5	71	0	203
5:45 PM	0	3	0	0	0	1	0	0	0	0	107	1	0	2	104	0	218
Total Survey	0	7	0	3	0	1	0	1	0	0	944	15	0	18	713	0	1,702

	_			
	Ped	estrians	& Bicy	cles
	In Cro	osswalk	(By Loc	ation)
	North	South	East	West
	0	0	0	0
	0	0	0	0
	1	0	0	0
	0	0	0	0
	1	0	0	0
	0	0	0	0
_	0	0	0	0
	0	0	0	0
	2	0	0	0

wв 😓

In 386 Out 479

HV 0.8% PHF 0.86

t₀

4 375

₹ 11 U0

In

Out 19 HV 0.0%

PHF 0.33

ив ф

U 0

SB ⊕

In 1 Out 0

HV 0.0%

U0 0.25

477 🗪

8

EB → In 485

Out 378 HV 1.6%

PHF 0.84

U 0

Peak Hour Summary

5:00 PM to 6:00 PM

Peak Hour Summary 5:00 PM to 6:00 PM

By Approa	oh	NW		bound IC ELM	DR			bound AVE SE		NE		oound TWAY N	IW	NE		oound FWAY N	1W	Total
Арргоа	511	In	Out	Total	HV	In	Out	Total	HV	In	Out	Total	HV	In	Out	Total	HV	
Volum	е	4	19	23	0	1	0	1	0	485	378	863	8	386	479	865	3	876
%HV			0.0	0%			0.0	0%			1.6	6%			0.6	3%		1.3%
PHF			0.	33			0.	25			0.	84			0.	86		0.86

Ped	estrians	& Bicy	cles
In Cro	osswalk	(By Loc	ation)
North	South	East	West
1	0	0	0

By Movement	NW		bound IC ELM	DR		South 200TH	bound AVE SE		NE	Eastb WPORT	ound WAY N	1W	NE	Westl WPOR1		١W	Total
Movement	U	L	Т	R	U	L	Т	R	U	L	Т	R	U	L	Т	R	
Volume	0	3	0	1	0	1	0	0	0	0	477	8	0	11	375	0	876
%HV	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.7%	0.0%	0.0%	0.0%	0.8%	0.0%	1.3%
PHF	0.00	0.25	0.00	0.25	0.00	0.25	0.00	0.00	0.00	0.00	0.84	0.67	0.00	0.55	0.86	0.00	0.86

Rolling Hour Summary 4:00 PM to 6:00 PM


Interval Start	NW	North PACIF	bound IC ELM	DR			bound AVE SE		NE		ound ΓWAY N	ıw	NE		oound 「WAY N	IW	Interval
Time	U	L	T	R	Ü	L	Т	R	U	L	Т	R	U	L	Т	R	Total
4:00 PM	0	4	0	2	0	0	0	1	0	0	467	7	0	7	338	0	826
4:15 PM	0	2	0	3	0	0	0	1	0	0	463	8	0	7	343	0	827
4:30 PM	0	0	0	3	0	0	0	0	0	0	487	9	0	8	366	0	873
4:45 PM	0	0	0	3	0	0	0	0	0	0	496	9	0	11	347	0	866
5:00 PM	0	3	0	1	0	1	0	0	0	0	477	8	0	11	375	0	876

_															
ı	Ped	estrians	& Bicy	cles											
	In Cro	osswalk	(By Loc	ation)											
	North	North South East West													
1	1	0	0	0											
1	2	0	0	0											
]	2	0	0	0											
]	1	0	0	0											
l	1	0	0	0											

Heavy Vehicle Summary



Eric Boivin (303) 668-0220



NW PACIFIC ELM DR & NEWPORT WAY NW

Wednesday, July 29, 2015 4:00 PM to 6:00 PM

15-Minute Interval Summary 4:00 PM to 6:00 PM

Interval Start			orthbou ACIFIC E					outhbou TH AVE					astbour ORT W					ORT W			Interval
Time	U	L	T	R	Total	U	L	Т	R	Total	U	L	Т	R	Total	Ü	L	T	R	Total	Total
4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1
4:15 PM	0	0	0	0	0	0	0	0	1	1	0	0	4	0	4	0	0	0	0	0	5
4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	0	0	0	0	2
4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	3	0	3	0	0	1	0	1	4
5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	3	0	3	0	0	0	0	0	3
5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	2	0	2	3
5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	0	0	1
Total Survey	0	0	0	0	0	0	0	0	1	1	0	0	14	1	15	0	0	3	0	3	2

Peak Hour Summary 5:00 PM to 6:00 PM

By		No	orthbound			outhbound		_	astbound		-	Vestbound	
Approach		NW PA	CIFIC ELM DR		200	TH AVE SE		NEWP	ORT WAY NW		NEWF	PORT WAY NW	Total
Арргоасп	In	Out	Total	In	Out	Total	In	Out	Total	In	Out	Total	
Volume	0	0	0	0	0	0	8	3	11	3	8	11	11

Ву			orthbou					uthbou TH AVE				NEWP(astbour					estboui			Total
Movement	U	L	T	R	Total	U	L	Т	R	Total	U	L	T	R	Total	U	L	T	R	Total	Total
Volume	0	0	0	0	0	0	0	0	0	0	0	0	8	0	8	0	0	3	0	3	11

Rolling Hour Summary 4:00 PM to 6:00 PM

Interval Start			orthbou CIFIC E					outhbou TH AVE				_	astboui ORT W					ORT W			Interval
Time	Ü	L	T	R	Total	U	L	Т	R	Total	U	L	Т	R	Total	Ü	L	Т	R	Total	Total
4:00 PM	0	0	0	0	0	0	0	0	1	1	0	0	6	1	7	0	0	0	0	0	8
4:15 PM	0	0	0	0	0	0	0	0	1	1	0	0	9	0	9	0	0	1	0	1	11
4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	8	0	8	0	0	1	0	1	9
4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	7	0	7	0	0	3	0	3	10
5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	8	0	8	0	0	3	0	3	11

6401 Lake Washington Blvd SE Newcastle, WA 98056 425-228-0072 www.alltrafficdata.net

Site Code: 1 Date Start: 28-Jul-15 NEWPORT WAY NW W/O NW PACIFIC ELM DR Station ID: 1

Date End: 30-Jul-15

Start	27-Jul	-15	Tu	ıe	W	ed	TI	hu	Fr	ri	Sa	t	Sur	າ	Week Av	verage
Time	EB	WB	EB	WB	EB	WB	EB	WB	EB	WB	EB	WB	EB	WB	EB	WB
12:00 AM	*	*	9	16	14	9	15	23	*	*	*	*	*	*	13	16
01:00	*	*	5	4	7	8	6	6	*	*	*	*	*	*	6	6
02:00	*	*	2	4	5	3	5	3	*	*	*	*	*	*	4	3
03:00	*	*	5	5	1	5	1	2	*	*	*	*	*	*	2	4
04:00	*	*	3	11	5	16	10	12	*	*	*	*	*	*	6	13
05:00	*	*	24	36	21	29	27	35	*	*	*	*	*	*	24	33
06:00	*	*	68	211	79	209	77	212	*	*	*	*	*	*	75	211
07:00	*	*	156	549	158	493	152	496	*	*	*	*	*	*	155	513
08:00	*	*	214	622	228	535	247	545	*	*	*	*	*	*	230	567
09:00	*	*	218	458	206	382	234	356	*	*	*	*	*	*	219	399
10:00	*	*	199	220	167	262	191	263	*	*	*	*	*	*	186	248
11:00	*	*	218	265	210	247	249	264	*	*	*	*	*	*	226	259
12:00 PM	*	*	200	289	219	263	236	296	*	*	*	*	*	*	218	283
01:00	*	*	233	259	250	265	248	255	*	*	*	*	*	*	244	260
02:00	*	*	268	253	285	260	269	267	*	*	*	*	*	*	274	260
03:00	*	*	367	326	397	292	392	306	*	*	*	*	*	*	385	308
04:00	*	*	467	361	465	337	470	355	*	*	*	*	*	*	467	351
05:00	*	*	464	415	474	379	615	373	*	*	*	*	*	*	518	389
06:00	*	*	422	291	425	315	533	286	*	*	*	*	*	*	460	297
07:00	*	*	204	227	229	232	342	262	*	*	*	*	*	*	258	240
08:00	*	*	136	227	157	225	136	218	*	*	*	*	*	*	143	223
09:00	*	*	97	137	119	126	92	162	*	*	*	*	*	*	103	142
10:00	*	*	39	45	69	68	51	88	*	*	*	*	*	*	53	67
11:00	*	*	38	26	32	36	32	35	*	*	*	*	*	*	34	32
Lane	0	0	4056	5257	4222	4996	4630	5120	0	0	0	0	0	0	4303	5124
Day	0		931		921	-	975		0		0		0		9427	
AM Peak	-	-	09:00	08:00	08:00	08:00	11:00	08:00	-	-	-	-	-	-	08:00	08:00
Vol.	-	-	218	622	228	535	249	545	-	-	-	-	-	-	230	567
PM Peak	-	-	16:00	17:00	17:00	17:00	17:00	17:00	-	-	-	-	-	-	17:00	17:00
Vol.	-	-	467	415	474	379	615	373	-	-	_	-	-	-	518	389
Comb. Total	0		9	313	Ş	218	Ş	9750		0		0	(0	94	427
ADT	ΑI	OT 9,427	AAI	OT 9,427												

6401 Lake Washington Blvd SE Newcastle, WA 98056 425-228-0072 www.alltrafficdata.net

Site Code: 1
Date Start: 28-Jul-15
NEWPORT WAY NW W/O NW PACIFIC ELM DR
Station ID: 1
Date End: 30-Jul-15

EB																	
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		85th	95th
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Percent	Percent
07/28/15	0	0	0	1	0	1	2	2	3	0	0	0	0	0	9	52	54
01:00	0	0	0	0	0	1	3	1	0	0	0	0	0	0	5	46	48
02:00	0	0	0	0	0	1	0	1	0	0	0	0	0	0	2	48	50
03:00	0	0	0	0	1	2	1	1	0	0	0	0	0	0	5	46	48
04:00	0	0	0	0	0	0	1	2	0	0	0	0	0	0	3	49	50
05:00	0	1	0	0	6	4	10	3	0	0	0	0	0	0	24	45	47
06:00	0	0	0	0	4	23	19	17	4	1	0	0	0	0	68	48	52
07:00	7	1	0	1	5	45	72	21	3	1	0	0	0	0	156	45	49
08:00	12	2	2	1	10	61	99	26	1	0	0	0	0	0	214	45	48
09:00	6	3	1	0	20	65	85	29	8	1	0	0	0	0	218	46	50
10:00	4	0	0	4	16	60	79	31	5	0	0	0	0	0	199	46	49
11:00	3	0	0	2	24	68	90	29	2	0	0	0	0	0	218	45	48
12 PM	2	0	0	0	15	80	77	24	2	0	0	0	0	0	200	45	48
13:00	9	0	0	3	20	61	102	33	2	1	1	0	1	0	233	45	49
14:00	7	1	1	3	24	94	100	34	3	1	0	0	0	0	268	45	48
15:00	9	1	0	4	24	113	160	49	6	0	0	1	0	0	367	45	48
16:00	12	2	5	11	39	143	197	54	4	0	0	0	0	0	467	45	48
17:00	15	0	1	2	62	149	196	38	1	0	0	0	0	0	464	44	46
18:00	16	0	4	4	41	140	165	48	3	1	0	0	0	0	422	45	48
19:00	12	0	0	9	10	65	86	16	5	1	0	0	0	0	204	44	48
20:00	1	0	1	3	29	54	36	12	0	0	0	0	0	0	136	43	47
21:00	1	0	0	3	11	45	28	6	2	0	1	0	0	0	97	44	48
22:00	1	0	0	2	5	10	12	6	3	0	0	0	0	0	39	47	51
23:00	0	0	0	1	4	13	11	6	3	0	0	0	0	0	38	47	51
Total	117	11	15	54	370	1298	1631	489	60	7	2	1	1	0	4056		
Percent	2.9%	0.3%	0.4%	1.3%	9.1%	32.0%	40.2%	12.1%	1.5%	0.2%	0.0%	0.0%	0.0%	0.0%			
AM Peak	08:00	09:00	08:00	10:00	11:00	11:00	08:00	10:00	09:00	06:00					09:00		
Vol.	12	3	2	4	24	68	99	31	8	1					218		
PM Peak	18:00	16:00	16:00	16:00	17:00	17:00	16:00	16:00	15:00	13:00	13:00	15:00	13:00		16:00		
Vol.	16	2	5	11	62	149	197	54	6	1	1	1	1		467		

6401 Lake Washington Blvd SE Newcastle, WA 98056 425-228-0072 www.alltrafficdata.net

Site Code: 1
Date Start: 28-Jul-15
NEWPORT WAY NW W/O NW PACIFIC ELM DR
Station ID: 1
Date End: 30-Jul-15

EB																	
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		85th	95th
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Percent	Percent
07/29/15	0	0	0	1	1	5	3	3	0	1	0	0	0	0	14	48	56
01:00	0	0	0	0	1	1	1	4	0	0	0	0	0	0	7	48	50
02:00	0	0	0	1	0	0	1	2	1	0	0	0	0	0	5	51	53
03:00	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1	39	40
04:00	0	0	0	1	1	1	2	0	0	0	0	0	0	0	5	43	44
05:00	0	1	0	1	3	2	9	3	1	1	0	0	0	0	21	47	54
06:00	0	0	0	1	4	21	29	21	3	0	0	0	0	0	79	47	50
07:00	10	0	0	2	13	46	51	25	10	1	0	0	0	0	158	47	51
08:00	10	2	2	4	7	56	102	40	5	0	0	0	0	0	228	46	49
09:00	5	1	1	3	13	81	65	35	2	0	0	0	0	0	206	45	48
10:00	1	0	0	0	16	49	82	15	4	0	0	0	0	0	167	45	48
11:00	5	0	1	7	21	89	65	22	0	0	0	0	0	0	210	44	47
12 PM	7	0	2	4	31	80	71	22	2	0	0	0	0	0	219	44	47
13:00	8	1	2	2	30	83	100	19	5	0	0	0	0	0	250	44	47
14:00	6	0	0	2	42	94	109	28	4	0	0	0	0	0	285	44	48
15:00	7	1	1	11	39	119	169	46	4	0	0	0	0	0	397	45	48
16:00	10	0	2	6	27	114	208	91	7	0	0	0	0	0	465	46	49
17:00	12	0	2	6	34	148	196	73	3	0	0	0	0	0	474	45	48
18:00	9	1	1	6	23	139	195	48	3	0	0	0	0	0	425	45	48
19:00	4	0	4	3	7	73	101	29	7	1	0	0	0	0	229	45	49
20:00	5	1	3	4	13	57	48	22	3	1	0	0	0	0	157	45	49
21:00	0	0	0	5	19	39	39	12	5	0	0	0	0	0	119	45	49
22:00	0	0	0	3	11	24	25	5	1	0	0	0	0	0	69	44	47
23:00	0	0	0	0	6	8	9	9	0	0	0	0	0	0	32	47	49
Total	99	8	21	73	362	1330	1680	574	70	5	0	0	0	0	4222		
Percent	2.3%	0.2%	0.5%	1.7%	8.6%	31.5%	39.8%	13.6%	1.7%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak	07:00	08:00	08:00	11:00	11:00	11:00	08:00	08:00	07:00	00:00					08:00		
Vol.	10	2	2	7	21	89	102	40	10	1					228		
PM Peak	17:00	13:00	19:00	15:00	14:00	17:00	16:00	16:00	16:00	19:00					17:00		
Vol.	12	1	4	11	42	148	208	91	7	1					474		

6401 Lake Washington Blvd SE Newcastle, WA 98056 425-228-0072 www.alltrafficdata.net

Site Code: 1
Date Start: 28-Jul-15
NEWPORT WAY NW W/O NW PACIFIC ELM DR
Station ID: 1
Date End: 30-Jul-15

EB																Date Lina	. 00 001 10
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		85th	95th
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Percent	Percent
07/30/15	0	0	0	0	5	2	4	4	0	0	0	0	0	0	15	47	49
01:00	0	0	0	0	1	2	2	1	0	0	0	0	0	0	6	45	48
02:00	0	0	0	0	0	0	2	3	0	0	0	0	0	0	5	48	50
03:00	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	54	55
04:00	0	0	0	0	2	1	3	4	0	0	0	0	0	0	10	48	49
05:00	0	1	0	0	5	3	12	6	0	0	0	0	0	0	27	46	49
06:00	0	0	1	2	3	10	39	18	4	0	0	0	0	0	77	47	50
07:00	6	1	0	0	9	49	59	20	7	1	0	0	0	0	152	46	50
08:00	12	2	4	2	26	69	99	30	2	1	0	0	0	0	247	45	48
09:00	9	0	2	4	17	73	96	29	4	0	0	0	0	0	234	45	48
10:00	6	0	1	5	16	73	65	25	0	0	0	0	0	0	191	45	48
11:00	5	0	0	3	29	102	79	25	6	0	0	0	0	0	249	44	48
12 PM	6	1	3	5	26	77	94	21	3	0	0	0	0	0	236	44	47
13:00	5	1	2	2	25	99	86	23	3	2	0	0	0	0	248	44	48
14:00	8	0	0	1	18	96	108	32	6	0	0	0	0	0	269	45	48
15:00	8	0	1	3	51	118	163	43	4	1	0	0	0	0	392	45	48
16:00	14	0	2	0	31	152	211	58	2	0	0	0	0	0	470	45	48
17:00	21	0	0	1	33	235	258	61	5	1	0	0	0	0	615	44	47
18:00	18	0	1	4	41	193	216	52	8	0	0	0	0	0	533	44	48
19:00	6	3	0	7	42	108	136	36	4	0	0	0	0	0	342	44	48
20:00	2	0	0	2	22	57	40	12	1	0	0	0	0	0	136	44	47
21:00	3	0	0	3	9	42	23	12	0	0	0	0	0	0	92	44	48
22:00	0	0	0	1	16	16	12	4	2	0	0	0	0	0	51	44	49
23:00	0	0	0	0	3	2	20	4	2	0	1	0	0	0	32	47	53
Total	129	9	17	45	430	1579	1827	523	64	6	1	0	0	0	4630		
Percent	2.8%	0.2%	0.4%	1.0%	9.3%	34.1%	39.5%	11.3%	1.4%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak	08:00	08:00	08:00	10:00	11:00	11:00	08:00	08:00	07:00	07:00					11:00		
Vol.	12	2	4	5	29	102	99	30	7	1					249		
PM Peak	17:00	19:00	12:00	19:00	15:00	17:00	17:00	17:00	18:00	13:00	23:00				17:00		
Vol.	21	3	3	7	51	235	258	61	8	2	11				615		
Grand Total	345	28	53	172	1162	4207	5138	1586	194	18	3	1	1	0	12908		
Percent	2.7%	0.2%	0.4%	1.3%	9.0%	32.6%	39.8%	12.3%	1.5%	0.1%	0.0%	0.0%	0.0%	0.0%			

15th Percentile : 34 MPH 50th Percentile : 40 MPH 85th Percentile : 45 MPH 95th Percentile : 48 MPH

Statistics 10 MPH Pace Speed: 37-46 MPH Number in Pace: 8369

Percent in Pace : 64.8%

Number of Vehicles > 40 MPH : 6941

Percent of Vehicles > 40 MPH : 53.8%

Mean Speed(Average) : 39 MPH

6401 Lake Washington Blvd SE Newcastle, WA 98056 425-228-0072 www.alltrafficdata.net

Site Code: 2 Date Start: 28-Jul-15 NEWPORT WAY NW E/O NW PACIFIC ELM DR Station ID: 2

Date End: 30-Jul-15

Start	27-Jul	l-15	Tu	ie	We	ed	TI	nu	Fı	ri	Sa	t	Sui	n	Week A	verage
Time	EB	WB	EB	WB	EB	WB	EB	WB	EB	WB	EB	WB	EB	WB	EB	ŴВ
12:00 AM	*	*	9	15	15	9	11	23	*	*	*	*	*	*	12	16
01:00	*	*	5	4	7	8	6	6	*	*	*	*	*	*	6	6
02:00	*	*	2	4	5	3	5	3	*	*	*	*	*	*	4	3
03:00	*	*	5	5	1	5	1	2	*	*	*	*	*	*	2	4
04:00	*	*	3	11	5	15	8	11	*	*	*	*	*	*	5	12
05:00	*	*	24	35	22	27	27	33	*	*	*	*	*	*	24	32
06:00	*	*	66	205	78	201	71	209	*	*	*	*	*	*	72	205
07:00	*	*	159	540	157	493	155	489	*	*	*	*	*	*	157	507
08:00	*	*	218	604	232	531	246	539	*	*	*	*	*	*	232	558
09:00	*	*	211	461	212	378	244	361	*	*	*	*	*	*	222	400
10:00	*	*	196	214	171	257	187	267	*	*	*	*	*	*	185	246
11:00	*	*	217	257	210	248	242	264	*	*	*	*	*	*	223	256
12:00 PM	*	*	201	284	219	262	240	288	*	*	*	*	*	*	220	278
01:00	*	*	231	259	245	264	244	252	*	*	*	*	*	*	240	258
02:00	*	*	265	257	287	262	264	258	*	*	*	*	*	*	272	259
03:00	*	*	368	317	404	285	386	303	*	*	*	*	*	*	386	302
04:00	*	*	461	363	463	337	472	356	*	*	*	*	*	*	465	352
05:00	*	*	471	417	475	378	622	369	*	*	*	*	*	*	523	388
06:00	*	*	415	295	430	314	517	295	*	*	*	*	*	*	454	301
07:00	*	*	202	236	233	234	348	265	*	*	*	*	*	*	261	245
08:00	*	*	130	236	154	236	137	222	*	*	*	*	*	*	140	231
09:00	*	*	94	131	114	127	87	165	*	*	*	*	*	*	98	141
10:00	*	*	36	44	65	67	48	87	*	*	*	*	*	*	50	66
11:00	*	*	35	26	33	35	31	34	*	*	*	*	*	*	33	32
Lane	0	0	4024	5220	4237	4976	4599	5101	0	0	0	0	0	0	4286	5098
Day	0		924		921		970		0		0		0		938	
AM Peak	-	-	08:00	08:00	08:00	08:00	08:00	08:00	-	-	-	-	-	-	08:00	08:00
Vol.	-	-	218	604	232	531	246	539	-	-	-	-	-	-	232	558
PM Peak	-	-	17:00	17:00	17:00	17:00	17:00	17:00	-	-	-	-	-	-	17:00	17:00
Vol.	-	-	471	417	475	378	622	369	=	-	-	-	-	-	523	388
Comb. Total	0)	g	244	g	9213	ç	9700		0		0		0	9	384
ADT	AΓ	OT 9,386	AAI	OT 9,386												

6401 Lake Washington Blvd SE Newcastle, WA 98056 425-228-0072 www.alltrafficdata.net

Site Code: 2
Date Start: 28-Jul-15
NEWPORT WAY NW E/O NW PACIFIC ELM DR
Station ID: 2
Date End: 30-Jul-15

WB																	
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		85th	95th
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Percent	Percent
07/28/15	0	0	0	0	1	6	4	3	1	0	0	0	0	0	15	47	51
01:00	0	0	0	0	1	1	2	0	0	0	0	0	0	0	4	43	45
02:00	0	0	0	0	1	1	0	2	0	0	0	0	0	0	4	48	50
03:00	0	1	0	0	1	0	0	0	0	2	0	1	0	0	5	65	68
04:00	0	0	0	0	0	2	3	5	1	0	0	0	0	0	11	49	52
05:00	0	0	0	1	3	8	14	4	4	0	1	0	0	0	35	49	54
06:00	1	0	1	3	2	48	108	42	0	0	0	0	0	0	205	46	48
07:00	7	1	2	9	19	165	257	79	1	0	0	0	0	0	540	45	48
08:00	14	0	7	13	52	209	268	36	4	0	0	0	1	0	604	44	46
09:00	12	1	7	15	16	121	233	51	5	0	0	0	0	0	461	45	48
10:00	8	1	2	2	11	51	106	29	3	1	0	0	0	0	214	45	48
11:00	11	0	4	3	9	81	126	20	3	0	0	0	0	0	257	44	47
12 PM	17	3	3	4	9	82	130	32	3	1	0	0	0	0	284	45	48
13:00	7	3	2	6	21	87	101	31	0	0	0	1	0	0	259	45	48
14:00	10	1	5	6	16	76	116	22	4	1	0	0	0	0	257	44	48
15:00	13	1	4	10	11	81	160	35	1	1	0	0	0	0	317	45	47
16:00	14	3	10	4	25	111	150	43	2	1	0	0	0	0	363	45	48
17:00	25	1	6	14	10	120	197	41	3	0	0	0	0	0	417	44	47
18:00	18	0	3	4	16	83	129	40	2	0	0	0	0	0	295	45	48
19:00	8	0	4	5	22	62	107	24	4	0	0	0	0	0	236	45	48
20:00	3	0	7	8	11	85	96	24	2	0	0	0	0	0	236	44	47
21:00	0	1	1	3	8	54	46	11	7	0	0	0	0	0	131	45	50
22:00	0	0	0	0	2	11	23	5	2	1	0	0	0	0	44	46	51
23:00	0	0	11	0	1_	5	10	4	4	11	0	0	0	0	26	51	55
Total	168	17	69	110	268	1550	2386	583	56	9	1	2	1	0	5220		
Percent	3.2%	0.3%	1.3%	2.1%	5.1%	29.7%	45.7%	11.2%	1.1%	0.2%	0.0%	0.0%	0.0%	0.0%			
AM Peak	08:00	03:00	08:00	09:00	08:00	08:00	08:00	07:00	09:00	03:00	05:00	03:00	08:00		08:00		
Vol.	14	1_	7	15	52	209	268	79	5	2	11	11	11		604		
PM Peak	17:00	12:00	16:00	17:00	16:00	17:00	17:00	16:00	21:00	12:00		13:00			17:00		
Vol.	25	3	10	14	25	120	197	43	7	1		1			417		

6401 Lake Washington Blvd SE Newcastle, WA 98056 425-228-0072 www.alltrafficdata.net

Site Code: 2
Date Start: 28-Jul-15
NEWPORT WAY NW E/O NW PACIFIC ELM DR
Station ID: 2
Date End: 30-Jul-15

WB																Date Lina	. 50 Jul 15
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		85th	95th
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Percent	Percent
07/29/15	0	0	0	0	0	0	6	2	1	0	0	0	0	0	9	49	52
01:00	0	0	0	0	0	3	3	2	0	0	0	0	0	0	8	47	49
02:00	0	0	0	1	0	0	1	1	0	0	0	0	0	0	3	47	49
03:00	0	0	0	0	0	1	1	2	0	1	0	0	0	0	5	56	58
04:00	1	1	0	0	1	5	4	2	1	0	0	0	0	0	15	46	51
05:00	2	0	1	1	2	7	10	4	0	0	0	0	0	0	27	45	48
06:00	2	1	1	1	6	43	111	33	3	0	0	0	0	0	201	46	49
07:00	7	1	0	6	3	111	299	59	7	0	0	0	0	0	493	45	48
08:00	13	1	15	9	15	155	287	34	2	0	0	0	0	0	531	44	46
09:00	11	4	7	5	18	115	175	38	4	1	0	0	0	0	378	45	48
10:00	3	0	9	8	5	54	128	48	2	0	0	0	0	0	257	46	49
11:00	5	1	2	7	12	68	125	26	1	1	0	0	0	0	248	45	47
12 PM	9	3	1	8	16	100	103	20	2	0	0	0	0	0	262	44	47
13:00	6	1	2	4	16	85	124	22	4	0	0	0	0	0	264	44	47
14:00	11	1	5	3	20	62	131	25	4	0	0	0	0	0	262	45	48
15:00	11	0	2	3	4	105	136	21	2	1	0	0	0	0	285	44	47
16:00	16	1	6	5	15	101	148	43	2	0	0	0	0	0	337	45	48
17:00	24	5	12	13	10	99	158	53	4	0	0	0	0	0	378	45	48
18:00	15	0	3	11	14	92	139	32	6	2	0	0	0	0	314	45	48
19:00	6	0	4	5	17	90	75	34	2	0	1	0	0	0	234	45	48
20:00	9	1	5	10	17	76	96	20	2	0	0	0	0	0	236	44	47
21:00	1	1	2	2	11	32	64	10	4	0	0	0	0	0	127	45	48
22:00	2	0	2	0	3	17	25	13	3	1	1	0	0	0	67	47	52
23:00	0	0	0	2	2	6	17	4	2	11	1	0	0	0	35	48	56
Total	154	22	79	104	207	1427	2366	548	58	8	3	0	0	0	4976		
Percent	3.1%	0.4%	1.6%	2.1%	4.2%	28.7%	47.5%	11.0%	1.2%	0.2%	0.1%	0.0%	0.0%	0.0%			
AM Peak	08:00	09:00	08:00	08:00	09:00	08:00	07:00	07:00	07:00	03:00					08:00		
Vol.	13	4	15	9	18	155	299	59	7	1					531		
PM Peak	17:00	17:00	17:00	17:00	14:00	15:00	17:00	17:00	18:00	18:00	19:00				17:00		
Vol.	24	5	12	13	20	105	158	53	6	2	1				378		

6401 Lake Washington Blvd SE Newcastle, WA 98056 425-228-0072 www.alltrafficdata.net

Site Code: 2
Date Start: 28-Jul-15
NEWPORT WAY NW E/O NW PACIFIC ELM DR
Station ID: 2
Date End: 30-Jul-15

WB																	
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		85th	95th
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Percent	Percent
07/30/15	0	1	1	0	2	4	10	3	2	0	0	0	0	0	23	47	52
01:00	0	0	0	0	0	4	1	1	0	0	0	0	0	0	6	45	48
02:00	0	0	0	0	0	3	0	0	0	0	0	0	0	0	3	39	40
03:00	0	0	0	0	1	0	0	0	0	1	0	0	0	0	2	58	60
04:00	1	1	1	0	1	1	4	0	1	1	0	0	0	0	11	50	56
05:00	0	0	0	1	3	5	12	8	3	1	0	0	0	0	33	49	54
06:00	9	1	3	0	4	33	118	36	5	0	0	0	0	0	209	46	49
07:00	10	1	4	8	13	119	260	69	4	1	0	0	0	0	489	45	48
08:00	11	1	6	4	28	186	254	47	2	0	0	0	0	0	539	44	47
09:00	14	3	16	6	20	133	134	33	1	1	0	0	0	0	361	44	47
10:00	7	1	3	7	7	59	138	41	4	0	0	0	0	0	267	45	49
11:00	8	0	4	6	22	69	112	41	1	1	0	0	0	0	264	45	48
12 PM	11	0	1	3	10	100	131	30	2	0	0	0	0	0	288	44	47
13:00	12	0	1	2	14	81	120	19	3	0	0	0	0	0	252	44	47
14:00	9	3	2	3	2	79	127	25	6	2	0	0	0	0	258	45	49
15:00	11	1	2	3	17	97	136	33	3	0	0	0	0	0	303	45	48
16:00	19	3	8	10	12	91	163	44	5	1	0	0	0	0	356	45	48
17:00	30	2	2	8	24	75	176	44	7	1	0	0	0	0	369	45	48
18:00	21	7	0	4	11	87	135	29	1	0	0	0	0	0	295	44	47
19:00	4	6	7	17	14	92	97	26	1	1	0	0	0	0	265	44	47
20:00	3	1	7	11	11	94	76	18	1	0	0	0	0	0	222	44	47
21:00	2	1	6	3	13	56	70	13	1	0	0	0	0	0	165	44	47
22:00	1	0	2	3	8	27	30	13	2	1	0	0	0	0	87	46	49
23:00	0	0	0	0	2	4	17	6	3	1	1	0	0	0	34	50	56
Total	183	33	76	99	239	1499	2321	579	58	13	1	0	0	0	5101		
Percent	3.6%	0.6%	1.5%	1.9%	4.7%	29.4%	45.5%	11.4%	1.1%	0.3%	0.0%	0.0%	0.0%	0.0%			
AM Peak	09:00	09:00	09:00	07:00	08:00	08:00	07:00	07:00	06:00	03:00					08:00		
Vol.	14	3	16	8	28	186	260	69	5	1					539		
PM Peak	17:00	18:00	16:00	19:00	17:00	12:00	17:00	16:00	17:00	14:00	23:00				17:00		_
Vol.	30	7	8	17	24	100	176	44	7	2	1				369		
Grand Total	505	72	224	313	714	4476	7073	1710	172	30	5	2	1	0	15297		
Percent	3.3%	0.5%	1.5%	2.0%	4.7%	29.3%	46.2%	11.2%	1.1%	0.2%	0.0%	0.0%	0.0%	0.0%			

15th Percentile : 34 MPH 50th Percentile : 40 MPH 85th Percentile : 45 MPH 95th Percentile : 48 MPH

Statistics 10 MPH Pace Speed: 37-46 MPH

 Number in Pace :
 10334

 Percent in Pace :
 67.6%

 Number of Vehicles > 40 MPH :
 8993

 Percent of Vehicles > 40 MPH :
 58.8%

 Mean Speed(Average) :
 39 MPH

24-Hour Volume Summary - Newport Way NW / NW Pacific Elm Drive	Existing Year = 2015	Future Year = 2018	% Growth = 0%	Seasonality Factor = 10%

		Tuesday 7/2	28/15		Wednesday 7/29/15					Thursday 7/	30/15		2015 Existing - 3 Day Average					2015 Existing w/ Seasonality Factor				
	EB	WB		SB	EB	WB		SB	EB	WB		SB	EB	WB		SB	Total	EB	WB		SB	Total
	(Newport	(Newport	NB	(Site	(Newport	(Newport	NB	(Site	(Newport	(Newport	NB	(Site	(Newport	(Newport	NB	(Site	Entering	(Newport	(Newport	NB	(Site	Entering
Time	Way)	Way)		Access)	Way)	Way)		Access)	Way)	Way)		Access)	Way)	Way)		Access)	Volume	Way)	Way)		Access)	Volume
12:00 AM	9	15	0	0	14	9	0	0	15	23	0	0	13	16	0	0	28	14	17	0	0	31
1:00 AM	5	4	0	0	7	8	0	0	6	6	0	0	6	6	0	0	12	7	7	0	0	13
2:00 AM	2	4	0	0	5	3	0	0	5	3	0	0	4	3	0	0	7	4	4	0	0	8
3:00 AM	5	5	0	0	1	5	0	0	1	2	0	0	2	4	0	0	6	3	4	0	0	7
4:00 AM	3	11	0	0	5	15	0	0	10	11	0	0	6	12	0	0	18	7	14	0	0	20
5:00 AM	24	35	0	0	21	27	0	0	27	33	0	0	24	32	0	0	56	26	35	0	0	61
6:00 AM	68	205	0	0	79	201	0	0	77	209	0	0	75	205	0	0	280	82	226	0	0	308
7:00 AM	156	540	0	0	158	493	0	0	152	489	0	0	155	507	0	0	663	171	558	0	0	729
8:00 AM	214	604	0	0	228	531	0	0	247	539	0	0	230	558	0	0	788	253	614	0	0	866
9:00 AM	218	461	0	0	206	378	0	0	234	361	0	0	219	400	0	0	619	241	440	0	0	681
10:00 AM	199	214	0	0	167	257	0	0	191	267	0	0	186	246	0	0	432	204	271	0	0	475
11:00 AM	218	257	0	0	210	248	0	0	249	264	0	0	226	256	0	0	482	248	282	0	0	530
12:00 PM	200	284	0	0	219	262	0	0	236	288	0	0	218	278	0	0	496	240	306	0	0	546
1:00 PM	233	259	0	0	250	264	0	0	248	252	0	0	244	258	0	0	502	268	284	0	0	552
2:00 PM	268	257	0	0	285	262	0	0	269	258	0	0	274	259	0	0	533	301	285	0	0	586
3:00 PM	367	317	0	0	397	285	0	0	392	303	0	0	385	302	0	0	687	424	332	0	0	756
4:00 PM	467	363	0	0	465	337	0	0	470	356	0	0	467	352	0	0	819	514	387	0	0	901
5:00 PM	464	417	0	0	474	378	0	0	615	369	0	0	518	388	0	0	906	569	427	0	0	996
6:00 PM	422	295	0	0	425	314	0	0	533	295	0	0	460	301	0	0	761	506	331	0	0	837
7:00 PM	204	236	0	0	229	234	0	0	342	265	0	0	258	245	0	0	503	284	270	0	0	554
8:00 PM	136	236	0	0	157	236	0	0	136	222	0	0	143	231	0	0	374	157	254	0	0	412
9:00 PM	97	131	0	0	119	127	0	0	92	165	0	0	103	141	0	0	244	113	155	0	0	268
10:00 PM	39	44	0	0	69	67	0	0	51	87	0	0	53	66	0	0	119	58	73	0	0	131
11:00 PM	38	26	0	0	32	35	0	0	32	34	0	0	34	32	0	0	66	37	35	0	0	72
TOTAL	4,056	5,220	0	0	4,222	4,976	0	0	4,630	5,101	0	0	4,303	5,099	0	0	9,402	4,733	5,609	0	0	10,342



TOTAL 4,731

5,611

0

0

10,342

TOTAL

0

0

0

		2018 V	/ithout-Pro	ject			Project Trip Assignment							2018	With-Proj	ject]	Trips =	1,325
	EB	WB		SB	Total		EB	WB		SB	Total		EB	WB		SB	Total			
	(Newport	(Newport	NB	(Site	Entering		(Newport	(Newport	NB	(Site	Entering		(Newport	(Newport	NB	(Site	Entering			
	Way)	Way)		Access)	Volume		Way)	Way)		Access)	Volume		Way)	Way)		Access)	Volume		%	Trips
12:00 AM	14	17	0	0	31	12:00 AM	0	0	0	0	0	12:00 AM	14	17	0	0	31			0
1:00 AM	7	7	0	0	14	1:00 AM	0	0	0	0	0	1:00 AM	7	7	0	0	14			0
2:00 AM	4	4	0	0	8	2:00 AM	0	0	0	0	0	2:00 AN	4	4	0	0	8			0
3:00 AM	3	4	0	0	7	3:00 AM	0	0	0	0	0	3:00 AN	3	4	0	0	7			0
4:00 AM	7	14	0	0	21	4:00 AM	0	0	0	0	0	4:00 AN	7	14	0	0	21			0
5:00 AM	26	35	0	0	61	5:00 AM	0	0	0	0	0	5:00 AM	26	35	0	0	61			0
6:00 AM	82	226	0	0	308	6:00 AM	0	0	0	76	76	6:00 AM	82	226	0	76	384		5.7%	76
7:00 AM	171	558	0	0	729	7:00 AM	0	0	0	119	119	7:00 AM	171	558	0	119	848		9.0%	119
8:00 AM	253	614	0	0	867	8:00 AM	0	0	0	121	121	8:00 AM	253	614	0	121	988		9.1%	121
9:00 AM	241	440	0	0	681	9:00 AM	0	0	0	86	86	9:00 AN	241	440	0	86	767		6.5%	86
10:00 AM	204	271	0	0	475	10:00 AM	0	0	0	73	73	10:00 AM	204	271	0	73	548		5.5%	73
11:00 AM	248	282	0	0	530	11:00 AM	0	0	0	76	76	11:00 AM	248	282	0	76	606		5.7%	76
12:00 PM	240	306	0	0	546	12:00 PM	0	0	0	70	70	12:00 PM	240	306	0	70	616		5.3%	70
1:00 PM	268	284	0	0	552	1:00 PM	0	0	0	76	76	1:00 PM	268	284	0	76	628		5.7%	76
2:00 PM	301	285	0	0	586	2:00 PM	0	0	0	78	78	2:00 PM	301	285	0	78	664		5.9%	78
3:00 PM	424	332	0	0	756	3:00 PM	0	0	0	83	83	3:00 PM	424	332	0	83	839		6.3%	83
4:00 PM	514	387	0	0	901	4:00 PM	0	0	0	83	83	4:00 PM	514	387	0	83	984		6.3%	83
5:00 PM	569	427	0	0	996	5:00 PM	0	0	0	86	86	5:00 PM	569	427	0	86	1,082		6.5%	86
6:00 PM	506	331	0	0	837	6:00 PM	0	0	0	68	68	6:00 PM	506	331	0	68	905		5.1%	68
7:00 PM	284	270	0	0	554	7:00 PM	0	0	0	65	65	7:00 PM	284	270	0	65	619		4.9%	65
8:00 PM	157	254	0	0	411	8:00 PM	0	0	0	45	45	8:00 PM	157	254	0	45	456		3.4%	45
9:00 PM	113	155	0	0	268	9:00 PM	0	0	0	30	30	9:00 PM	113	155	0	30	298		2.3%	30
10:00 PM	58	73	0	0	131	10:00 PM	0	0	0	90	90	10:00 PM	58	73	0	90	221	10pm-6am	6.8%	90
11:00 PM	37	35	0	0	72	11:00 PM	0	0	0	0	0	11:00 PM	37	35	0	0	72	_		

1,325

1,325

TOTAL 4,731

5,611

0

1,325

11,667

100.00% 1,325

8/18/2015

Appendix B

Trip Generation Calculations

Issaquah Gateway Trip Generation

DAILY			-							
			ITE	Directio	nal Split	Trip Rate	Trips Generated			
Land Use	Units		LUC 1	In	Out	Total	In	Out	Total	
Proposed Use Apartments	400	Dwelling Units	220	50%	50%	6.65	1,330	1,330	2,660	
Less Existing Use Single-Family	1	Dwelling Units	210	50%	50%	9.52	-5	-5	-10	
			Net Nev	v Weekda	y Daily Trip	s Generated =	1,325	1,325	2,650	
AM PEAK HO	UR		ITE	Directio	nal Split	Trip Rate	Tı	rips Gene	rated	
Land Use	Units		LUC 1	In	Out	Total	In	Out	Total	
Proposed Use Apartments	400	Dwelling Units	220	20%	80%	0.51	41	163	204	
Less Existing Use Single-Family	1	Dwelling Units	210	25%	75%	0.75	0	-1	-1	
			Net Ne	w AM Pea	k Hour Trip	s Generated =	41	162	203	
PM PEAK HO	JR		ITE	Directio	nal Split	Trip Rate	Tı	rips Gene	rated	
Land Use	Units		LUC 1	In	Out	Total	ln	Out	Total	
Proposed Use Apartments	400	Dwelling Units	220	65%	35%	0.62	161	87	248	
Less Existing Use Single-Family	1	Dwelling Units	210	63%	37%	1.00	-1	0	-1	
			Net Ne	w PM Pea	k Hour Trip	s Generated =	160	87	247	

Notes:

Issaquah Gateway Apartments 4/24/2015

¹ Institute of Transportation Engineers, *Trip Generation Manual*, 9th Edition, 2012 Land Use Codes.

Appendix C

Level of Service (LOS) Calculations
Stop Controlled

Lanes, Volumes, Timings 1: NW Pacific Elm Drive/Site Access & Newport Way NW

	۶	→	•	•	•	•	•	†	~	>	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ř	†	7	ሻ	†	7		4		Ŋ	f÷	
Volume (vph)	25	245	0	2	655	16	8	0	3	63	0	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	10	12	12	10	12	11	11	11	11	11	11
Storage Length (ft)	100		50	100		100	0		0	0		0
Storage Lanes	1		1	1		1	0		0	1		0
Taper Length (ft)	25			25			25			25		
Link Speed (mph)		40			40			25			25	
Link Distance (ft)		789			651			281			301	
Travel Time (s)		13.4			11.1			7.7			8.2	
Confl. Peds. (#/hr)	7					7				7		7
Peak Hour Factor	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
Heavy Vehicles (%)	2%	2%	2%	2%	2%	2%	0%	0%	0%	1%	1%	1%
Shared Lane Traffic (%)												
Sign Control		Free			Free			Stop			Stop	

Intersection Summary

Area Type: Control Type: Unsignalized Other

Synchro 8 Report Issaquah Gateway

Interception													
Intersection	3.7												
Int Delay, s/veh	3.7												
Mayamant	EBL	EDT	EDD	WDI	MDT	WDD		NDI	NBT	NDD	SBL	CDT	CDD
Movement Vol, veh/h	25	245	EBR	WBL 2	WBT 655	WBR 16		NBL 8	0	NBR 3	63	SBT	SBR 100
Conflicting Peds, #/hr	25 7	245	0	0	000	7		0	0	0	7	0	7
Sign Control	Free	Free	Free	Free	Free	Free		Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None		310p	Jiop -	None	310p	Jiop	None
Storage Length	100	_	50	100	_	100		_	_	-	0	_	-
Veh in Median Storage, #		0	-	-	0	-		_	0	_	-	0	-
Grade, %	-	0	-	-	0	-		-	0	_	-	0	-
Peak Hour Factor	93	93	93	93	93	93		93	93	93	93	93	93
Heavy Vehicles, %	2	2	2	2	2	2		0	0	0	1	1	1
Mvmt Flow	27	263	0	2	704	17		9	0	3	68	0	108
Major/Minor	Major1			Major2				Minor1			Minor2		
Conflicting Flow All	711	0	0	263	0	0		1086	1033	270	1035	1033	718
Stage 1	-	-	-	-	-	-		317	317	-	716	716	-
Stage 2	-	-	-	-	-	-		769	716	-	319	317	-
Critical Hdwy	4.12	-	-	4.12	-	-		7.1	6.5	6.2	7.11	6.51	6.21
Critical Hdwy Stg 1	-	-	-	-	-	-		6.1	5.5	-	6.11	5.51	-
Critical Hdwy Stg 2	-	-	-	-	-	-		6.1	5.5	-	6.11	5.51	-
Follow-up Hdwy	2.218	-	-	2.218	-	-		3.5	4	3.3	3.509	4.009	3.309
Pot Cap-1 Maneuver	888	-	-	1301	-	-		196	234	774	211	233	431
Stage 1	-	-	-	-	-	-		698	658	-	423	436	-
Stage 2	-	-	-	-	-	-		397	437	-	695	656	-
Platoon blocked, %		-	-		-	-							
Mov Cap-1 Maneuver	884	-	-	1295	-	-		142	225	770	203	224	427
Mov Cap-2 Maneuver	-	-	-	-	-	-				-			-
Stage 1	-	-	-	-	-	-				-			-
Stage 2	-	-	-	-	-	-		295	434	-	668	636	-
Approach	EB			WB				NB			SB		
HCM Control Delay, s	0.9			0				26			22.1		
HCM LOS								D			С		
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR WBL	WBT	WBR S	SBLn1	SBLn2					
			-		-	_							
			-		-	-							
HCM Control Delay (s)			-		-	-							
HCM Lane LOS	D	Α	-	- A	-	-	D	С					
HCM 95th %tile Q(veh)	0.2	0.1	-	- 0	-	-	1.4	1					
Pot Cap-1 Maneuver Stage 1 Stage 2 Platoon blocked, % Mov Cap-1 Maneuver Mov Cap-2 Maneuver Stage 1 Stage 2 Approach HCM Control Delay, s HCM LOS Minor Lane/Major Mvmt Capacity (veh/h) HCM Lane V/C Ratio HCM Control Delay (s) HCM Lane LOS	888 884 EB 0.9 NBLn1 183 0.065 26 D	EBL 884 0.03 9.2 A	EBT -	1301	- - - - - - -	WBR \$	203 0.334 31.4 D	196 698 397 142 142 677 295 NB 26 D SBLn2 427 0.252 16.2 C	234 658 437	774 - - 770 -	211 423 695 203 203 408 668 SB 22.1	233 436 656	431 - -

Lanes, Volumes, Timings 1: NW Pacific Elm Drive/Site Access & Newport Way NW

	•	-	•	•	←	•	•	†	~	>	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	۲	†	7	ሻ	†	7		4		ň	4Î	
Volume (vph)	77	557	9	12	438	84	3	0	1	46	0	41
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	10	12	12	10	12	11	11	11	11	11	11
Storage Length (ft)	100		50	100		100	0		0	0		0
Storage Lanes	1		1	1		1	0		0	1		0
Taper Length (ft)	25			25			25			25		
Link Speed (mph)		40			40			25			25	
Link Distance (ft)		789			651			281			301	
Travel Time (s)		13.4			11.1			7.7			8.2	
Confl. Peds. (#/hr)	1					1				1		1
Peak Hour Factor	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86
Heavy Vehicles (%)	2%	2%	2%	1%	1%	1%	0%	0%	0%	0%	0%	0%
Shared Lane Traffic (%)												
Sign Control		Free			Free			Stop			Stop	

Intersection Summary

Area Type: Control Type: Unsignalized Other

Synchro 8 Report Issaquah Gateway

Intersection	2.2												
Int Delay, s/veh	3.3												
Movement	EBL	EBT	EBR	WBL	WBT	WBR		NBL	NBT	NBR	SBL	SBT	SBR
Vol, veh/h	77	557	9	12	438	84		3	0	1	46	0	41
Conflicting Peds, #/hr	1	0	0	0	0	1		0	0	0	1	0	1
Sign Control	Free	Free	Free	Free	Free	Free		Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None		-	-	None	-	-	None
Storage Length	100	-	50	100	-	100		-	-	-	0	-	-
Veh in Median Storage, #	-	0	-	-	0	-		-	0	-	-	0	-
Grade, %	-	0	-	-	0	-		-	0	-	-	0	-
Peak Hour Factor	86	86	86	86	86	86		86	86	86	86	86	86
Heavy Vehicles, %	2	2	2	1	1	1		0	0	0	0	0	0
Mvmt Flow	90	648	10	14	509	98		3	0	1	53	0	48
Major/Minor	Major1			Major2				Minor1			Minor2		
Conflicting Flow All	510	0	0	648	0	0		1389	1365	649	1365	1365	511
Stage 1	-	-	-	-	-	-		827	827	-	538	538	-
Stage 2	-	-	_	-	-	-		562	538	_	827	827	-
Critical Hdwy	4.12	-	_	4.11	-	_		7.1	6.5	6.2	7.1	6.5	6.2
Critical Hdwy Stg 1	-	-	-	-	-	-		6.1	5.5	-	6.1	5.5	-
Critical Hdwy Stg 2	-	_	_	-	_	-		6.1	5.5	-	6.1	5.5	-
Follow-up Hdwy	2.218	-	-	2.209	-	-		3.5	4	3.3	3.5	4	3.3
Pot Cap-1 Maneuver	1055	-	-	943	-	-		121	149	473	126	149	567
Stage 1	-	-	-	-	-	-		369	389	-	531	526	-
Stage 2	-	-	-	-	-	-		515	526	-	369	389	-
Platoon blocked, %		-	-		-	-							
Mov Cap-1 Maneuver	1054	-	-	942	-	-		102	134	473	116	134	566
Mov Cap-2 Maneuver	-	-	-	-	-	-		102	134	-	116	134	-
Stage 1	-	-	-	-	-	-		337	356	-	485	518	-
Stage 2	-	-	-	-	-	-		464	518	-	336	356	-
Approach	EB			WB				NB			SB		
HCM Control Delay, s	1			0.2				34.4			37.4		
HCM LOS	ļ			0.2				D			57.4 E		
HOW LOS								D			L		
Minor Lang/Major Muss	NDI n1	EBL	EDT	EBR WBL	WBT	WDD	DI n1	CDL 52					
Minor Lane/Major Mvmt	NBLn1		EBT			WBR S							
Capacity (veh/h)		1054	-	- 942	-	-	116	566					
HCM Cantrol Doloy (c)		0.085	-	- 0.015	-	-	0.461						
HCM Long LOS	34.4	8.7	-	- 8.9	-	-	60.2	11.9					
HCM Lane LOS	D	A	-	- A	-	-	F	В					
HCM 95th %tile Q(veh)	0.1	0.3	-	- 0	-	-	2	0.3					

Appendix D

2018 With-Project Level of Service (LOS) Calculations Signalized and Roundabout Alternatives

1: NW Pacific Elm Drive/Site Access & Newport Way NW

	۶	→	•	•	←	•	•	†	<i>></i>	>	ļ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	†	7	7	†	7		4		ሻ	₽	
Volume (vph)	25	245	0	2	655	16	8	0	3	63	0	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	10	12	12	10	12	11	11	11	11	11	11
Storage Length (ft)	100		50	100		100	0		0	0		0
Storage Lanes	1		1	1		1	0		0	1		0
Taper Length (ft)	25			25			25			25		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		40			40			25			25	
Link Distance (ft)		789			651			281			301	
Travel Time (s)		13.4			11.1			7.7			8.2	
Confl. Peds. (#/hr)	7					7						
Peak Hour Factor	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
Heavy Vehicles (%)	2%	2%	2%	2%	2%	2%	0%	0%	0%	1%	1%	1%
Shared Lane Traffic (%)												
Turn Type	Perm	NA	Perm	Perm	NA	Perm	Perm	NA		Perm	NA	
Protected Phases		4			8			2			6	
Permitted Phases	4		4	8		8	2			6		
Detector Phase	4	4	4	8	8	8	2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	10.0	10.0	10.0	5.0	5.0		5.0	5.0	
Minimum Split (s)	28.0	28.0	28.0	28.0	28.0	28.0	30.0	30.0		30.0	30.0	
Total Split (s)	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0		30.0	30.0	
Total Split (%)	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%		50.0%	50.0%	
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0		4.0	4.0	
All-Red Time (s)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		1.0	1.0	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0		0.0		0.0	0.0	
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0		5.0		5.0	5.0	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	None	None	None	None	None	None	None	None		None	None	

Intersection Summary

Area Type: Other


Cycle Length: 60

Actuated Cycle Length: 37.2

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Splits and Phases: 1: NW Pacific Elm Drive/Site Access & Newport Way NW



Issaquah Gateway
Synchro 8 Report

	•	→	•	•	—	•	•	†	~	<u> </u>	+	-√
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	Ť	†	7	7	†	7		4		7	4	
Volume (veh/h)	25	245	0	2	655	16	8	0	3	63	0	100
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		0.99	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1863	1863	1863	1863	1863	1863	1900	1900	1900	1881	1881	1900
Adj Flow Rate, veh/h	27	263	0	2	704	17	9	0	3	68	0	108
Adj No. of Lanes	1	1	1	1	1	1	0	1	0	1	1	0
Peak Hour Factor	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
Percent Heavy Veh, %	2	2	2	2	2	2	0	0	0	1	1	1
Cap, veh/h	417	976	829	740	976	824	289	29	34	460	0	214
Arrive On Green	0.52 727	0.52 1863	0.00 1583	0.52 1107	0.52	0.52 1573	0.13 547	0.00 217	0.13	0.13 1422	0.00	0.13
Sat Flow, veh/h					1863				255			1599
Grp Volume(v), veh/h	27	263	0	2	704	17	12	0	0	68	0	108
Grp Sat Flow(s), veh/h/ln	727	1863	1583	1107	1863	1573	1018	0	0	1422	0	1599
Q Serve(g_s), s	0.9	2.3	0.0	0.0	8.5	0.2	0.0	0.0	0.0	0.0	0.0	1.8
Cycle Q Clear(g_c), s	9.3 1.00	2.3	0.0	2.3	8.5	0.2 1.00	1.8 0.75	0.0	0.0	1.0	0.0	1.8
Prop In Lane	417	976	1.00 829	1.00 740	976	824	352	0	0.25	1.00 460	0	1.00 214
Lane Grp Cap(c), veh/h V/C Ratio(X)	0.06	0.27	0.00	0.00	0.72	0.02	0.03	0.00	0.00	0.15	0.00	0.50
Avail Cap(c_a), veh/h	658	1594	1355	1107	1594	1346	1342	0.00	0.00	1486	0.00	1368
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	0.00	1.00	1.00	1.00	1.00	0.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	8.9	3.9	0.00	4.5	5.3	3.3	11.1	0.0	0.0	11.4	0.0	11.8
Incr Delay (d2), s/veh	0.0	0.1	0.0	0.0	0.4	0.0	0.0	0.0	0.0	0.1	0.0	0.7
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(-26165%),veh/ln		1.2	0.0	0.0	4.2	0.1	0.1	0.0	0.0	0.5	0.0	0.9
LnGrp Delay(d),s/veh	8.9	3.9	0.0	4.5	5.7	3.4	11.1	0.0	0.0	11.4	0.0	12.4
LnGrp LOS	Α	А		Α	Α	А	В			В		В
Approach Vol, veh/h		290			723			12			176	
Approach Delay, s/veh		4.4			5.6			11.1			12.1	
Approach LOS		А			А			В			В	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		8.9		20.3		8.9		20.3				
Change Period (Y+Rc), s		5.0		5.0		5.0		5.0				
Max Green Setting (Gmax), s		25.0		25.0		25.0		25.0				
Max Q Clear Time (g_c+l1), s		3.8		11.3		3.8		10.5				
Green Ext Time (p_c), s		0.5		3.5		0.5		3.6				
Intersection Summary												
HCM 2010 Ctrl Delay			6.3									
HCM 2010 LOS			Α									

Issaquah Gateway 2018 With-Project - AM Peak Hour (with signal)

LEVEL OF SERVICE




Site: Issaquah Gateway - 2018 With Project - AM Peak Hour

Roundabout

All Movement Classes

	Southeast	Northeast	Northwest	Southwest	Intersection
LOS	В	В	Α	Α	В

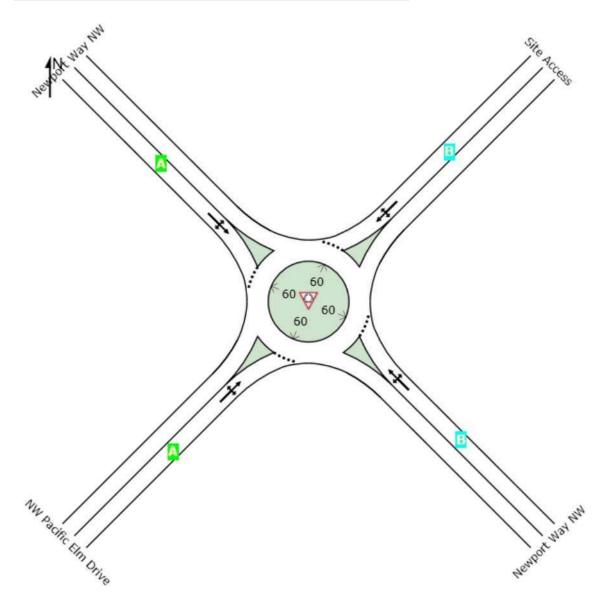

Level of Service (LOS) Method: Delay & v/c (HCM 2010).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 2010).

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Organisation: TENW | Processed: Monday, August 17, 2015 3:20:06 PM

Project: T:\Active Projects\Issaquah Gateway Apts - 4917\Planning - 4917\LOS\Issaquah Gateway Apartments - Site Access Analysis.sip6

LANE SUMMARY



Site: Issaquah Gateway - 2018 With Project - AM Peak Hour

Roundabout

Lane Use a	nd Perforr	nance	;										
	Demand F Total veh/h	Flows HV %	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Average Delay sec	Level of Service	95% Back of Veh	Queue Dist ft	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
SouthEast: N	ewport Way	/ NW											
Lane 1 ^d	724	2.3	1064	0.680	100	13.6	LOS B	6.2	158.2	Full	1600	0.0	0.0
Approach	724	2.3		0.680		13.6	LOS B	6.2	158.2				
NorthEast: Si	ite Access												
Lane 1 ^d	176	1.0	538	0.328	100	11.6	LOS B	1.3	31.9	Full	1600	0.0	0.0
Approach	176	1.0		0.328		11.6	LOS B	1.3	31.9				
NorthWest: N	lewport Way	/ NW											
Lane 1 ^d	291	2.4	1027	0.284	100	6.3	LOS A	1.3	31.9	Full	1600	0.0	0.0
Approach	291	2.4		0.284		6.3	LOSA	1.3	31.9				
SouthWest: N	NW Pacific E	Elm Dri	ive										
Lane 1 ^d	13	0.0	784	0.016	100	4.8	LOS A	0.1	1.4	Full	1600	0.0	0.0
Approach	13	0.0		0.016		4.8	LOSA	0.1	1.4				
Intersection	1204	2.1		0.680		11.5	LOS B	6.2	158.2				

Level of Service (LOS) Method: Delay & v/c (HCM 2010).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 2010).

Roundabout Capacity Model: US HCM 2010.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

d Dominant lane on roundabout approach

SIDRA INTERSECTION 6.1 | Copyright @ 2000-2015 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: TENW | Processed: Monday, August 17, 2015 3:20:06 PM

Project: T:\Active Projects\lssaquah Gateway Apts - 4917\Planning - 4917\LOS\lssaquah Gateway Apartments - Site Access Analysis.sip6

1: NW Pacific Elm Drive/Site Access & Newport Way NW

	۶	→	•	•	←	•	•	†	<i>></i>	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	¥	†	7	7	†	7		4		ሻ	f)	
Volume (vph)	77	557	9	12	438	84	3	0	1	46	0	41
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	10	12	12	10	12	11	11	11	11	11	11
Storage Length (ft)	100		50	100		100	0		0	0		0
Storage Lanes	1		1	1		1	0		0	1		0
Taper Length (ft)	25			25			25			25		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		40			40			25			25	
Link Distance (ft)		789			651			281			301	
Travel Time (s)		13.4			11.1			7.7			8.2	
Confl. Peds. (#/hr)	1					1				1		1
Peak Hour Factor	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86
Heavy Vehicles (%)	2%	2%	2%	1%	1%	1%	0%	0%	0%	0%	0%	0%
Shared Lane Traffic (%)												
Turn Type	Perm	NA	Perm	Perm	NA	Perm	Perm	NA		Perm	NA	
Protected Phases		4			8			2			6	
Permitted Phases	4		4	8		8	2			6		
Detector Phase	4	4	4	8	8	8	2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0	10.0	10.0	10.0	10.0	5.0	5.0		5.0	5.0	
Minimum Split (s)	28.0	28.0	28.0	28.0	28.0	28.0	30.0	30.0		30.0	30.0	
Total Split (s)	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0		30.0	30.0	
Total Split (%)	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%		50.0%	50.0%	
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0		4.0	4.0	
All-Red Time (s)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		1.0	1.0	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0		0.0		0.0	0.0	
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0		5.0		5.0	5.0	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	None	None	None	None	None	None	None	None		None	None	

Intersection Summary

Area Type: Other


Cycle Length: 60

Actuated Cycle Length: 30.1

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Splits and Phases: 1: NW Pacific Elm Drive/Site Access & Newport Way NW



Issaquah Gateway
Synchro 8 Report

	۶	→	•	•	•	•	•	†	~	\	Ţ	→
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	Ť	†	7	Ť	†	7		4		7	4	
Volume (veh/h)	77	557	9	12	438	84	3	0	1	46	0	41
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1863	1863	1863	1881	1881	1881	1900	1900	1900	1900	1900	1900
Adj Flow Rate, veh/h	90	648	10	14	509	98	3	0	1	53	0	48
Adj No. of Lanes	1	1	1	1	1	1	0	1	0	1	1	0
Peak Hour Factor	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86
Percent Heavy Veh, %	2	2	2	1	1	1	0	0	0	0	0	0
Cap, veh/h	550	979	832	479	989	840	315	29	37	427	0	168
Arrive On Green	0.53	0.53	0.53	0.53	0.53	0.53	0.10	0.00	0.10	0.10	0.00	0.10
Sat Flow, veh/h	810	1863	1582	780	1881	1597	787	278	355	1439	0	1611
Grp Volume(v), veh/h	90	648	10	14	509	98	4	0	0	53	0	48
Grp Sat Flow(s), veh/h/ln	810	1863	1582	780	1881	1597	1420	0	0	1439	0	1611
Q Serve(g_s), s	2.2	6.8	0.1	0.4	4.8	0.8	0.0	0.0	0.0	0.0	0.0	0.7
Cycle Q Clear(g_c), s	6.9	6.8	0.1	7.2	4.8	0.8	0.7	0.0	0.0	0.7	0.0	0.7
Prop In Lane	1.00	070	1.00	1.00	000	1.00	0.75	0	0.25	1.00	•	1.00
Lane Grp Cap(c), veh/h	550	979	832	479	989	840	381	0	0	427	0	168
V/C Ratio(X)	0.16	0.66	0.01	0.03	0.51	0.12	0.01	0.00	0.00	0.12	0.00	0.29
Avail Cap(c_a), veh/h	874	1724	1464	791	1741	1479	1553	0	0	1609	0	1491
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	6.4	4.7	3.1	7.3	4.2	3.2	10.9	0.0	0.0	11.2	0.0	11.2
Incr Delay (d2), s/veh	0.1	0.3	0.0	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.3
Initial Q Delay(d3),s/veh %ile BackOfQ(-26165%),veh/ln		3.5	0.0	0.0	2.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
LnGrp Delay(d),s/veh	6.5	4.9	3.1	7.3	4.3	3.3	10.9	0.0	0.0	11.2	0.0	11.5
LnGrp LOS	0.5 A	4.9 A	3.1 A	7.3 A	4.3 A	3.3 A	10.9 B	0.0	0.0	11.2 B	0.0	11.5 B
	A	748	A	A	621	A	В	4		В	101	В
Approach Vol, veh/h Approach Delay, s/veh		5.1			4.2			10.9			11.4	
Approach LOS		3.1 A			4.2 A			10.9 B			11.4 B	
• •		А			А			D			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		7.8		19.2		7.8		19.2				
Change Period (Y+Rc), s		5.0		5.0		5.0		5.0				
Max Green Setting (Gmax), s		25.0		25.0		25.0		25.0				
Max Q Clear Time (g_c+l1), s		2.7		8.9		2.7		9.2				
Green Ext Time (p_c), s		0.2		5.0		0.2		4.9				
Intersection Summary												
HCM 2010 Ctrl Delay			5.2									
HCM 2010 LOS			Α									

Issaquah Gateway 2018 With-Project - PM Peak Hour (with signal)

LEVEL OF SERVICE




Site: Issaquah Gateway - 2018 With Project - PM Peak Hour

Roundabout

All Movement Classes

	Southeast	Northeast	Northwest	Southwest	Intersection
LOS	В	Α	С	Α	В

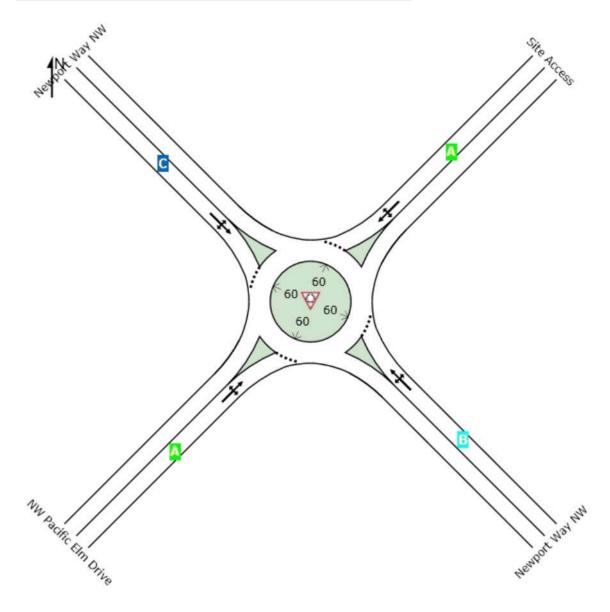

Level of Service (LOS) Method: Delay & v/c (HCM 2010).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 2010).

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Organisation: TENW | Processed: Monday, August 17, 2015 3:22:31 PM

Project: T:\Active Projects\Issaquah Gateway Apts - 4917\Planning - 4917\LOS\Issaquah Gateway Apartments - Site Access Analysis.sip6

LANE SUMMARY



Site: Issaquah Gateway - 2018 With Project - PM Peak Hour

Roundabout

Lane Use ar	nd Perforr	nance)										
	Demand F		_	Deg.	Lane	Average	Level of	95% Back of		Lane	Lane	Сар.	Prob.
	Total	HV	Cap.	Satn	Util.	Delay	Service	Veh	Dist	Config	Length	Adj.	Block.
0 45 4 14	veh/h	%	veh/h	v/c	%	sec			ft		ft	%	%
SouthEast: No													
Lane 1 ^d	621	8.0	1019	0.609	100	11.9	LOS B	4.5	113.1	Full	1600	0.0	0.0
Approach	621	8.0		0.609		11.9	LOS B	4.5	113.1				
NorthEast: Sit	e Access												
Lane 1 ^d	102	0.0	664	0.154	100	7.2	LOSA	0.5	13.7	Full	1600	0.0	0.0
Approach	102	0.0		0.154		7.2	LOS A	0.5	13.7				
NorthWest: No	ewport Way	y NW											
Lane 1 ^d	748	1.6	1038	0.720	100	15.4	LOS C	7.0	178.0	Full	1600	0.0	0.0
Approach	748	1.6		0.720		15.4	LOS C	7.0	178.0				
SouthWest: N	W Pacific E	Elm Dri	ive										
Lane 1 ^d	6	0.0	506	0.011	100	7.2	LOSA	0.0	0.9	Full	1600	0.0	0.0
Approach	6	0.0		0.011		7.2	LOS A	0.0	0.9				
Intersection	1477	1.1		0.720		13.4	LOS B	7.0	178.0				

Level of Service (LOS) Method: Delay & v/c (HCM 2010).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 2010).

Roundabout Capacity Model: US HCM 2010.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

d Dominant lane on roundabout approach

SIDRA INTERSECTION 6.1 | Copyright @ 2000-2015 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: TENW | Processed: Monday, August 17, 2015 3:22:31 PM

Project: T:\Active Projects\lssaquah Gateway Apts - 4917\Planning - 4917\LOS\lssaquah Gateway Apartments - Site Access Analysis.sip6

Appendix E

Signal Warrant Analysis

Warrant 1 - Eight Hour Vehicular Volume Condition A - Minimum Vehicular Volume

Hour Begins	Minor Approach Future Site Access Highest NB/SB (2)	Major Approach Newport Way Total EB & WB (2)	MUTCD (1) Warrant 1A
6:00	76	308	
7:00	119	729	
8:00	121	867	
9:00	86	681	
10:00	73	475	
11:00	76	530	
12:00	70	546	
13:00	76	552	
14:00	78	586	
15:00	83	756	
16:00	83	901	
17:00	86	996	
18:00	68	837	
19:00	65	554	

WARRANT MET (3) =

NO

Notes:

- (1) MUTCD Manual on Uniform Traffic Control Devices, 2009.
- (2) Three-day average of 24-hour volumes conducted on 7/28, 7/29, and 7/30, 2015.
- (3) Signal warrant satisfied when traffic volumes exist for each of any 8 hours of an average day.

MUTCD Warrant Requirements

Warrant 1, Condition A: Minimum Vehicular Volume

Minimum volume of 350 vehicles per hour on 1-lane major street (both approaches) and 140 vehicles per hour on 2-lane minor street approach.



Warrant 1 - Eight Hour Vehicular Volume
Condition B - Interruption of Continuous Traffic

Hour Begins	Minor Approach Future Site Access Highest NB/SB (2)	Major Approach Newport Way Total EB & WB (2)	MUTCD (1) Warrant 1B
6:00	76	308	
7:00	119	729	YES
8:00	121	867	YES
9:00	86	681	YES
10:00	73	475	
11:00	76	530	YES
12:00	70	546	YES
13:00	76	552	YES
14:00	78	586	YES
15:00	83	756	YES
16:00	83	901	YES
17:00	86	996	YES
18:00	68	837	
19:00	65	554	

WARRANT MET (3) =

YES

Notes:

- (1) MUTCD Manual on Uniform Traffic Control Devices, 2009.
- (2) Three-day average of 24-hour volumes conducted on 7/28, 7/29, and 7/30, 2015.
- (3) Signal warrant satisfied when traffic volumes exist for each of any 8 hours of an average day.

MUTCD Warrant Requirements

Warrant 1, Condition B: Interruption of Continuous Traffic

Minimum volume of 525 vehicles per hour on 1-lane major street (both approaches) and 70 vehicles per hour on 2-lane minor street approach.



Warrant 1 - Eight Hour Vehicular Volume
Combination of Condition A and Condition B

	Minor Approach	Major Approach	MUTCD (1)		
Hour	Future Site Access	Newport Way		56%	56%
Begins	Highest NB/SB (2)	Total EB & WB (2)	Warrant 1 A/B	Condition A	Condition B
6:00	76	308			
7:00	119	729	YES	YES	YES
8:00	121	867	YES	YES	YES
9:00	86	681			YES
10:00	73	475			YES
11:00	76	530			YES
12:00	70	546			YES
13:00	76	552			YES
14:00	78	586			YES
15:00	83	756			YES
16:00	83	901			YES
17:00	86	996			YES
18:00	68	837			YES
19:00	65	554			YES

WARRANT MET (3) = NO

Notes:

- (1) MUTCD Manual on Uniform Traffic Control Devices, 2009.
- (2) Three-day average of 24-hour volumes conducted on 7/28, 7/29, and 7/30, 2015.
- (3) Signal warrant satisfied when traffic volumes exist for each of any 8 hours of an average day.

MUTCD Warrant Requirements

Warrant 1: Combination of A and B

The combination of warrants is satisfied where Condition A and Condition B are satisfied to the extent of 56 percent or more of the stated values.

NOTE:

This combination warrant only applies after an adequate trial of other alternatives that could cause less delay and inconvenience to traffic has failed to solve the traffic problems.



Warrant 2 - Four Hour Vehicular Volume

Hour Begins	Minor Approach Future Site Access Highest NB/SB (2)	Major Approach Newport Way Total EB & WB (2)	MUTCD (1) Warrant 2
6:00	76	308	
7:00	119	729	
8:00	121	867	YES
9:00	86	681	
10:00	73	475	
11:00	76	530	
12:00	70	546	
13:00	76	552	
14:00	78	586	
15:00	83	756	NO
16:00	83	901	YES
17:00	86	996	YES
18:00	68	837	
17:00	65	554	

WARRANT MET (3) = NO

Notes:

- (1) MUTCD Manual on Uniform Traffic Control Devices, 2009.
- (2) Three-day average of 24-hour volumes conducted on 7/28, 7/29, and 7/30, 2015.
- (3) Signal warrant satisfied when traffic volumes exist for each of any 4 hours of an average day.

MUTCD Warrant Requirements


Warrant 2: Four Hour Vehicular Volume

The plotted points representing the vehicles per hour on the major street (total of both approaches) and the corresponding vehicles per hour on the higher volume minor street approach (one direction only) all fall above the applicable curve in Figure 4C-2 for the existing combination of approach lanes.



Warrant 2 - Four Hour Vehicular Volume

Figure 4C-2. Warrant 2, Four-Hour Vehicular Volume (70% Factor)
(COMMUNITY LESS THAN 10,000 POPULATION OR ABOVE 40 MPH ON MAJOR STREET)

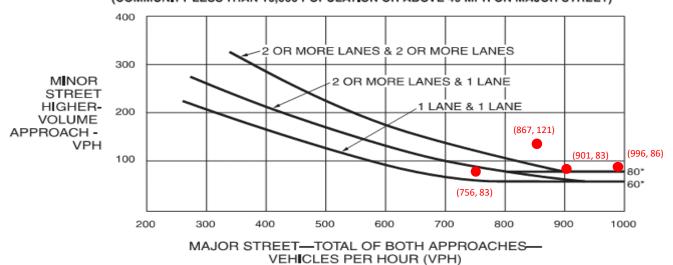

*Note: 80 vph applies as the lower threshold volume for a minor-street approach with two or more lanes and 60 vph applies as the lower threshold volume for a minor-street approach with one lane.

WARRANT MET (2) = NO

Notes:

- (1) The four highest hourly minor/major approach volumes as shown in the data for Warrant 1.
- (2) The signal warrant is satisfied when the conditions given below exist for each of any 4 hours of an average day.

MUTCD Warrant Requirements

Warrant 2: Four Hour Vehicular Volume

The plotted points representing the vehicles per hour on the major street (total of both approaches) and the corresponding vehicles per hour on the higher volume minor street approach (one direction only) all fall above the applicable curve in Figure 4C-2 for the existing combination of approach lanes. On the minor street, the higher volume shall not be required to be on the same approach during each of these 4 hours.



Warrant 3 - Peak Hour (AM Peak Hour)

Condition A

This warrant is met if all three of the following conditions exist for the same 1 hour (any four consecutive 15-minute periods) of an average day:

 The total stopped delay experienced by the traffic on one minor-street approach (one direction only) controlled by a STOP sign equals or exceeds: 4 vehicle-hours for a one-lane approach; or 5 vehicle-hours for a two-lane approach

CONDITION 1 MET =	NO		
Vehicle-Hours =	0.71	veh-hours	
Total Volume (veh/hr) =	163	veh/hour	
Stopped Delay (sec/veh) =	15.7	sec/veh	
Control Delay (sec/veh) =	20.4	sec/veh	**Based on results from HCM 2010 analysis
Newport Way / Future Site Access,	SB approach (2 lanes)		

163

2. The volume on the same minor-street approach (one direction only) equals or exceeds 100 vehicles per hour for one moving lane of traffic or 150 vehicles per hour for two moving lanes.

Newport Way / Future Site Access, SB approach volume =

CONDITION 2 MET = YES	
The total entering volume serviced during the hour equals or exceeds 650 vehicle per h	
with three approaches or 800 vehicles per hour for intersections with four or more appro	acries.
Newport Way / Future Site Access, Total volume =	1,065
CONDITION 3 MET = YES	
- <u></u>	
WARRANT MET =	NO

NOTE:

3.

This signal warrant shall only be applied in unusual cases. Such cases include, but are not limited to, office complexes, manufacturing plants, industrial complexes, or high-occupancy vehicle facilities that attract or discharge large numbers of vehicles over a short time.

Warrant 3 - Peak Hour (PM Peak Hour)

Condition A

This warrant is met if all three of the following conditions exist for the same 1 hour (any four consecutive 15-minute periods) of an average day:

> 1. The total stopped delay experienced by the traffic on one minor-street approach (one direction only) controlled by a STOP sign equals or exceeds: 4 vehicle-hours for a one-lane approach; or 5 vehicle-hours for a two-lane approach

Newport Way / Future Site Access,	SB approach (2 lanes)		
Control Delay (sec/veh) =	33.0	sec/veh	**Based on results from HCM 2010 analysis
Stopped Delay (sec/veh) =	25.4	sec/veh	
Total Volume (veh/hr) =	87	veh/hour	
Vehicle-Hours =	0.61	veh-hours	
CONDITION 1 MET =	NO		

WARRANT MET =

NO

2. The volume on the same minor-street approach (one direction only) equals or exceeds 100 vehicles per hour for one moving lane of traffic or 150 vehicles per hour for two moving lanes.

Newport Way / Future Site Access, SB approach volume =	87			
CONDITION 2 MET = NO				
3. The total entering volume serviced during the hour equals or exceeds 650 vehicle per hour for intersections				
with three approaches or 800 vehicles per hour for intersections with four or more approaches.				
Newport Way / Future Site Access, Total volume =	1,211			
CONDITION 3 MET = YES				

NOTE:

This signal warrant shall only be applied in unusual cases. Such cases include, but are not limited to, office complexes, manufacturing plants, industrial complexes, or high-occupancy vehicle facilities that attract or discharge large numbers of vehicles over a short time.

Warrant 3 - Peak Hour Condition B

	Minor Approach	Major Approach	MUTCD (1)
Hour	Rd R NW / 13th Ave SW	SR-28	
Begins	Highest NB/SB (2)	Total EB & WB (2)	Warrant 3
6:00	76	308	
7:00	119	729	
8:00	121	867	
9:00	86	681	
10:00	73	475	
11:00	76	530	
12:00	70	546	
13:00	76	552	
14:00	78	586	
15:00	83	756	
16:00	83	901	
17:00	86	996	NO
18:00	68	837	
19:00	65	554	

WARRANT MET (3) = NO

Notes:

- (1) MUTCD Manual on Uniform Traffic Control Devices, 2009.
- (2) Three-day average of 24-hour volumes conducted on 7/28, 7/29, and 7/30, 2015.
- (3) Signal warrant satisfied when traffic volumes exist for one hour of an average day.

MUTCD Warrant Requirements

Warrant 3: Peak Hour - Condition B

The plotted points representing the vehicles per hour on the major street (total of both approaches) and the corresponding vehicles per hour on the higher volume minor street approach (one direction only) for one hour (any four consectutive 15-minute periods) of an average day falls above the curve in Figure 4C-4 for the existing combination of approach lanes.


NOTE:

This signal warrant shall only be applied in unusual cases. Such cases include, but are not limited to, office complexes, manufacturing plants, industrial complexes, or high-occupancy vehicle facilities that attract or discharge large numbers of vehicles over a short time.



Warrant 3 - Peak Hour Condition B

Figure 4C-4. Warrant 3, Peak Hour (70% Factor)
(COMMUNITY LESS THAN 10.000 POPULATION OR ABOVE 40 MPH ON MAJOR STREET)

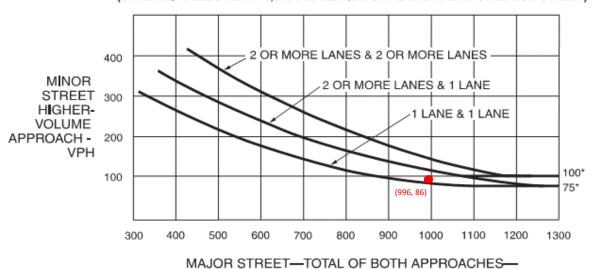

*Note: 100 vph applies as the lower threshold volume for a minor-street approach with two or more lanes and 75 vph applies as the lower threshold volume for a minor-street approach with one lane.

VEHICLES PER HOUR (VPH)

WARRANT MET (2) = NO

Notes:

- (1) The highest hourly minor/major approach volumes as shown in the data for Warrant 1.
- (2) The signal warrant is satisfied when the conditions given below exist for one hour of an average day.

MUTCD Warrant Requirements

Warrant 3: Peak Hour - Condition B

The plotted point representing the vehicles per hour on the major street (total of both approaches) and the corresponding vehicles per hour on the higher-volume minor street approach (one direction only) for 1 hour of an average day falls above the applicable curve in Figure 4C-4 for the existing combination of approach lanes.

NOTE:

This signal warrant shall only be applied in unusual cases. Such cases include, but are not limited to, office complexes, manufacturing plants, industrial complexes, or high-occupancy vehicle facilities that attract or discharge large numbers of vehicles over a short time.

